


Locking Devices

30 Amp Plugs, Connectors Flanged Devices and Receptacles

30A 3ØY 120/208V AC, 3ØY 277/480V AC and 3ØY 347/600V AC Locking Devices,
4-Pole 4-Wire and 4-Pole 5-Wire Grounding Inches (mm)

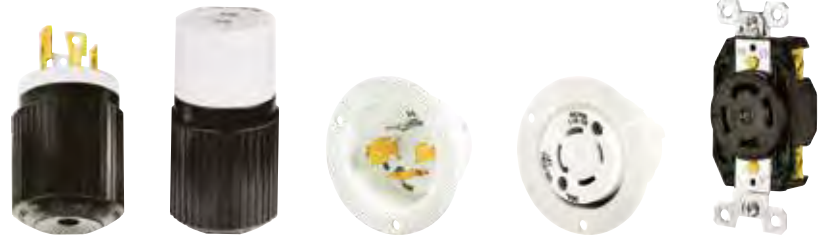


Rating	Poles/ Wires	Cord Diameter	Description	Tripple Gripper		Flanged Devices Equipment Base with Nylon White Cup		Single Nylon Receptacle, All Black
				Nylon Plug	Nylon Connector	Male	Female	
NEMA L18-30, 30A 3ØY 120/208V AC	4-Pole 4-Wire	.465"-1.150" (11.8-29.2)	Black/White	71830NP	71830NC	71830MB	71830ER	71830FR
 								
NEMA L19-30, 30A 3ØY 277/480V AC	4-Pole 4-Wire	.465"-1.150" (11.8-29.2)	Black/White	71930NP	71930NC	71930MB	71930ER	71930FR
 								
NEMA L20-30, 30A 3ØY 347/600V AC	4-Pole 4-Wire	.465"-1.150" (11.8-29.2)	Black/White	72030NP	72030NC	72030MB	72030ER	72030FR
 								
NEMA L21-30, 30A 3ØY 120/208V AC	4-Pole 5-Wire	.465"-1.150" (11.8-29.2)	Black/White	72130NP	72130NC	72130MB	72130ER	72130FR
 			Isolated Ground Orange	—	—	—	—	72130IG
NEMA L22-30, 30A 3ØY 277/480V AC	4-Pole 5-Wire	.465"-1.150" (11.8-29.2)	Black/White	72230NP	72230NC	72230MB	72230ER	72230FR
 								
NEMA L23-30, 30A 3ØY 347/600V AC	4-Pole 5-Wire	.465"-1.150" (11.8-29.2)	Black/White	72330NP	72330NC	72330MB	72330ER	72330FR
 								

Note: See Section D for more information on isolated ground devices and Section J for more information on corrosion-resistant devices.
See page H-20 for weather protective boots for 30 amp nylon locking plugs.

Product Dimensions Inches (mm)

Plug	
A	2.86" (72.4)
B	1.89" (48.0)
C	2.13" (54.1)
Connector	
A	3.90" (99.1)
B	1.89" (48.0)
C	2.13" (54.1)



	Receptacle	Flanged Devices
	Single	Male/ Female
A	3.28" (83.3)	3.06" (77.7)
B	2.38" (60.5)	120°
C	1.56" (39.6)	2.68" (68.1)
D	1.70" (43.2)	2.03" (51.6)
E	2.67" (67.8)	2.16" (54.9)
F	1.24" (31.5)	(3) 0.19" (4.8)

Note: See page S-8 for horsepower ratings.

