



Data  
Electrical data

Ratings per IEC/EN 60664-1

|                         |       |
|-------------------------|-------|
| Nominal voltage (III/3) | 800 V |
| Rated current           | 57 A  |

Approvals Ex

|                         |      |
|-------------------------|------|
| Rated current (Ex e II) | 50 A |
|-------------------------|------|

Subject to changes. Please also observe the further product documentation!



## Geometrical Data

|        |                      |
|--------|----------------------|
| Width  | 17,5 mm / 0.689 inch |
| Height | 23 mm / 0.906 inch   |
| Depth  | 4,1 mm / 0.161 inch  |

## Material Data

|           |            |
|-----------|------------|
| Color     | light gray |
| Fire load | 0.016 MJ   |
| Weight    | 3.9 g      |

## Commercial data

|                       |               |
|-----------------------|---------------|
| Product Group         | 22 (TOPJOB S) |
| Packaging type        | bag           |
| Country of origin     | DE            |
| GTIN                  | 4044918558174 |
| Customs tariff number | 85366990990   |

## Downloads

### CAD/CAE-Data

#### CAD data

2D/3D Models 2010-402

---

#### CAE data

EPLAN Data Portal 2010-402

---

WSCAD Universe 2010-402

---

ZUKEN Portal 2010-402


---

## Installation Notes


### Commoning

Subject to changes. Please also observe the further product documentation!

---

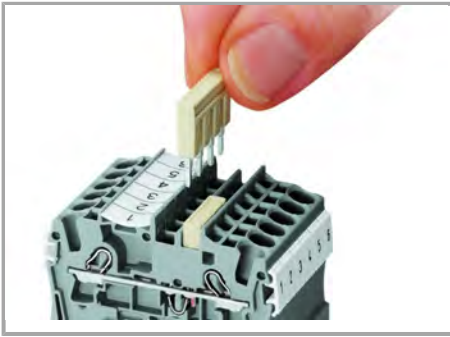

The push-in type jumper bar system is based on the common plug and socket principle. Each terminal block is spring-loaded with a double socket and a resilient CrNi steel spring. The jumper contact material is pure electrolytic copper, which allows for an extremely small design capable of carrying the full-rated current of the terminal block. Ground terminal blocks can also be commoned using the same jumper system. Custom jumpers are created by breaking and removing jumper contacts (2000, 2001, 2002, 2004 Series).

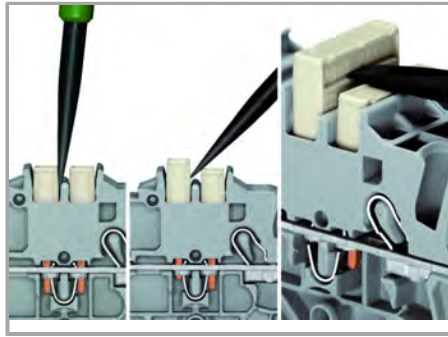

#### Removing a push-in type jumper bar.

Insert the operating tool between the jumper and the partition wall of the dual jumper slots, then lift up the jumper.

Place the operating tool in the center of jumpers up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

#### Commoning



Custom push-in type jumper bars are created by breaking off jumper contacts.



Marking a push-in type jumper bar using a felt-tip pen.

500 V


300 V

Subject to changes. Please also observe the further product documentation!


## Commoning



Stepping down via push-in type jumper bar.

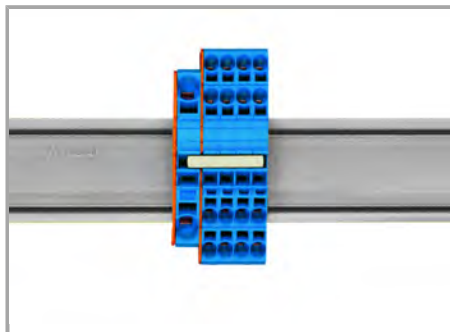


Stepping down via push-in type jumper bar.

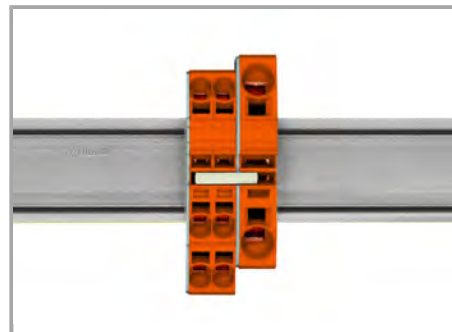

Stepping down via push-in type jumper bar.

Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm<sup>2</sup> (6 AWG) to 6 mm<sup>2</sup> (10 AWG) or from 6 mm<sup>2</sup> (10 AWG) to 2.5 mm<sup>2</sup> (14 AWG) (see illustration above).

Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm<sup>2</sup> (6 AWG) and 10 mm<sup>2</sup> (8 AWG) and one cross-section size for 6/4/2.5 mm<sup>2</sup> (10/12/14 AWG). An example: from 16 mm<sup>2</sup> (6 AWG) to 6 mm<sup>2</sup> (10 AWG) (see illustration above) or from 10 mm<sup>2</sup> (8 AWG) to 4 mm<sup>2</sup> (12 AWG).

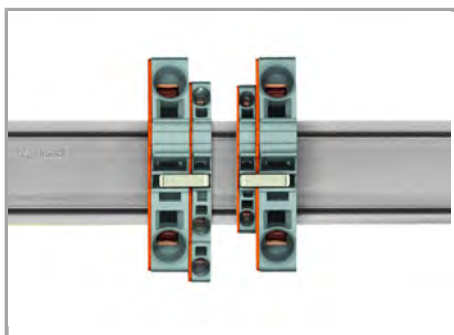

### Note:

The total current of the outgoing circuits shall not exceed the nominal current of the step-down jumper/push-in type jumper bar.

## Product family

Subject to changes. Please also observe the further product documentation!



#### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

---