SIEMENS

Data sheet 3RU2126-1HB0



Overload relay 5.5...8.0 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	6.6 W
• per pole	2.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	440 V
 between auxiliary and auxiliary circuit 	440 V
 between main and auxiliary circuit 	440 V
between main and auxiliary circuit	440 V
shock resistance acc. to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code acc. to IEC 81346-2	F
Substance Prohibitance (Date)	01.10.2009 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-40 +70 °C
 during storage 	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	5.5 8 A
operating voltage	
rated value	690 V

Web: https://www.bolenscontrol.com/ - Phone: (800) 658-5241 - Email: sales@bolenscontrol.com

at AC-3 rated value maximum	690 V		
operating frequency rated value	50 60 Hz		
operational current rated value	8 A		
operating power at AC-3			
at 400 V rated value	3 kW		
at 500 V rated value	4 kW		
at 690 V rated value	5.5 kW		
Auxiliary circuit			
design of the auxiliary switch	integrated		
number of NC contacts for auxiliary contacts	1		
• note	for contactor disconnection		
number of NO contacts for auxiliary contacts	1		
• note	for message "Tripped"		
number of CO contacts for auxiliary contacts	0		
operational current of auxiliary contacts at AC-15			
• at 24 V	3 A		
• at 110 V	3 A		
• at 120 V	3 A		
• at 125 V	3 A		
• at 230 V	2 A		
• at 400 V	1 A		
operational current of auxiliary contacts at DC-13			
• at 24 V	2 A		
● at 60 V	0.3 A		
● at 110 V	0.22 A		
• at 125 V	0.22 A		
● at 220 V	0.11 A		
contact rating of auxiliary contacts according to UL	B600 / R300		
Protective and monitoring functions			
trip class	CLASS 10		
trip class design of the overload release	CLASS 10 thermal		
design of the overload release			
design of the overload release UL/CSA ratings			
design of the overload release			
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor	thermal		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	thermal 8 A		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	thermal 8 A		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link	thermal 8 A 8 A		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection	thermal 8 A		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch	thermal 8 A 8 A		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required	thermal 8 A 8 A		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and	thermal 8 A 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit	thermal 8 A 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	thermal 8 A 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	thermal 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	thermal 8 A 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts — solid or stranded	thermal 8 A 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No screw-type terminals screw-type terminals Top and bottom 2x (1 2,5 mm²), 2x (2,5 10 mm²)		
design of the overload release UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value Short-circuit protection design of the fuse link • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product function removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections • for main contacts	thermal 8 A 8 A 8 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm 45 mm 85 mm No No screw-type terminals screw-type terminals Top and bottom		

type of connectable conductor cross-sections			
• for auxiliary contacts			
— solid or stranded	2v (0 F 1 F mm²) 2v (0 7F 2 F mm²)		
	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)		
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
at AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)		
tightening torque			
 for main contacts with screw-type terminals 	2 2.5 N·m		
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m		
design of screwdriver shaft	Diameter 5 6 mm		
size of the screwdriver tip	Pozidriv PZ 2		
design of the thread of the connection screw			
• for main contacts	M4		
 of the auxiliary and control contacts 	M3		
Safety related data			
failure rate [FIT] with low demand rate acc. to SN 31920	50 FIT		
MTTF with high demand rate	2 280 y		
T1 value for proof test interval or service life acc. to IEC 61508	20 y		
protection class IP on the front acc. to IEC 60529	IP20		
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front		
Display			
display version for switching status	Slide switch		
Certificates/ approvals			
General Product Approval		For use in hazardous locations	













Declaration of Conformity

Test Certificates

Marine / Shipping

Miscellaneous



Special Test Certific-ate Type Test Certific-ates/Test Report





Marine / Shipping

Lloyd's Register










Confirmation


other


Railway


Vibration and Shock

Further information

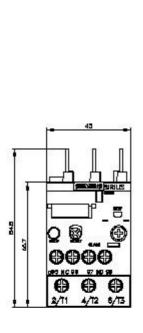

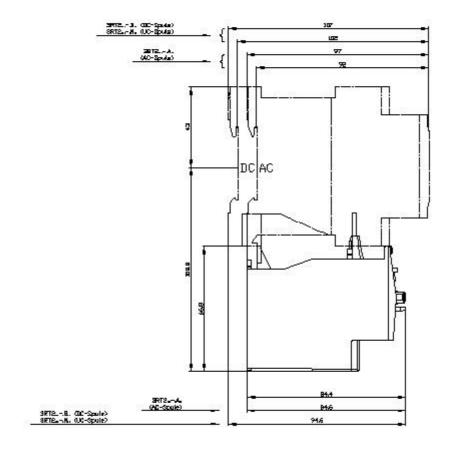

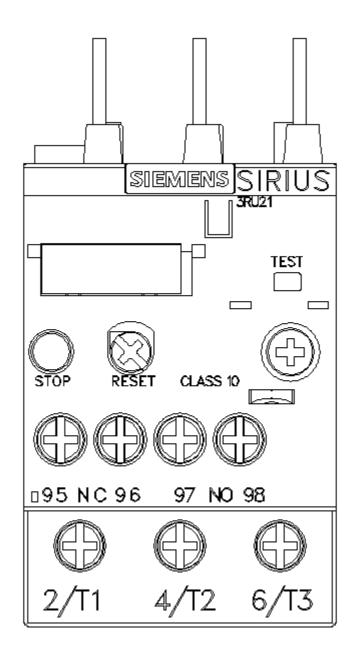

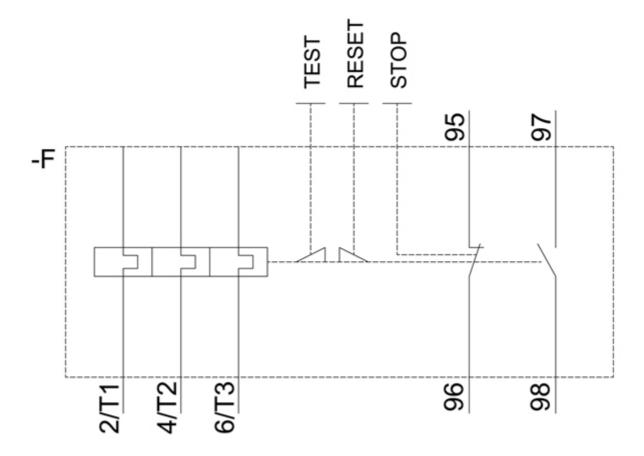

last modified: 12/15/2020 🖸