

Timer modules

86
SERIES



Machines for
ceramics



Machines
for paper
processing



Printing
machines



Packaging
machines





Wood-
processing
machines



Milk processing
plant



Textile machines

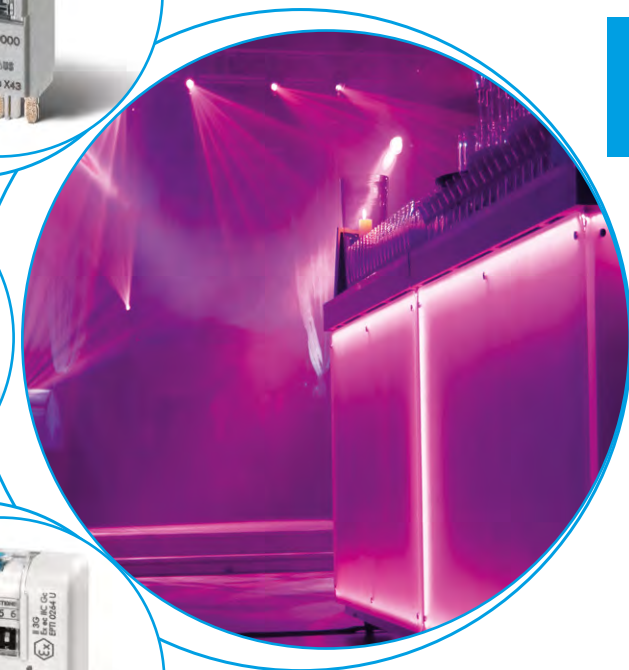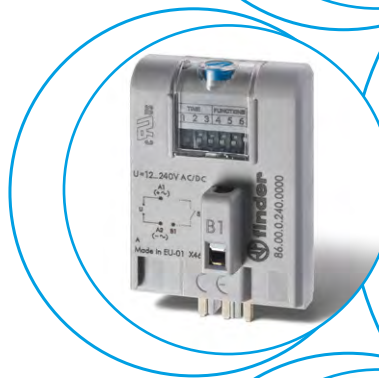

Timer modules for use in conjunction with relay & socket.

86.00 - Multi-function & multi-voltage timer module

86.30 - Bi-function & multi-voltage timer module


- Timer module type 86.00 for 90, 92, 96 series sockets and type 86.30 for 90, 92, 94, 95, 96, 97 series sockets
- Wide supply voltage range:
12...240 V AC/DC (86.00)
12...24 V AC/DC or 230...240 V AC (86.30)
- LED indicator
- Atex versions available

86.00



- Time scale: from 0.05 s to 100 h
- Multi-function
- Plug-in for use with 90.02, 90.03, 92.03 and 96.04 sockets

AI: On-delay
DI: Interval
SW: Symmetrical flasher (starting pulse on)
BE: Off-delay with control signal
CE: On- and off-delay with control signal
DE: Interval with control signal on
EE: Interval with control signal off
FE: Interval with control signal on and off

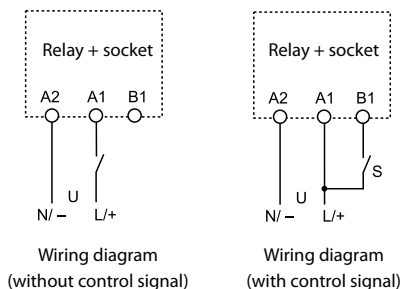


* For Atex versions, refer to the "Other data" table on the page 2
 For outline drawing see page 3

86.30



- Time scale: from 0.05 s to 100 h
- Bi-function
- Plug-in for use with 90.02, 90.03, 92.03, 94.P3, 94.P4, 94.02, 94.03, 94.04, 95.P3, 95.P5, 95.03, 95.05, 96.02, 96.04, 97.P1, 97.P2, 97.01 and 97.02 sockets

AI: On-delay
DI: Interval



Contact specification*

Contact configuration

Rated current/Maximum peak current	A
Rated voltage/ Maximum switching voltage	V AC
Rated load AC1	VA
Rated load AC15 (230 V AC)	VA
Single phase motor rating (230 V AC)	kW
Breaking capacity DC1: 30/110/220 V	A
Minimum switching load	mW (V/mA)

Standard contact material

Supply specification*

Nominal voltage (U _N)	V AC (50/60 Hz)	12...240
	V DC	12...240
Rated power AC/DC	W	1.2
Operating range	V AC (50/60 Hz)	10.2...265
	DC	10.2...265

Technical data

Specified time range	(0.05...1)s, (0.5...10)s, (5...100)s, (0.5...10)min, (5...100)min, (0.5...10)h, (5...100)h		
Repeatability	%	± 1	± 1
Recovery time	ms	≤ 50	≤ 50
Minimum control impulse	ms	50	—
Setting accuracy full range	%	± 5	± 5
Electrical life at rated load in AC1	cycles	See 56, 60 and 62 series relays	See 40, 44, 46, 55, 56, 60 and 62 series relays
Ambient temperature range	°C	-20...+50	-20...+50
Protection category		IP 20	IP 20

Approvals (according to type)



H

Ordering information

Example: 86 series multi-function timer module, (12...240)V AC/DC supply voltage.

8 6 . 0 0 . 0 . 2 4 0 . 0 0 0 0

Series

Type

0 = Multi-function (AI, DI, SW, BE, CE, DE, EE, FE)
3 = Bi-function (AI, DI)

No. of poles

See 40, 44, 46, 55, 56, 60 and 62 series relays
Poles for chosen relay/socket combination -
according to chart below

Supply voltage

024 = (12...24)V AC/DC (86.30 only)
120 = (110...125)V AC (86.30 only)
240 = (12...240)V AC/DC (86.00 only)
240 = (12...48) V AC/DC
(86.00.0.240.0073 only)
240 = (230...240)V AC (86.30 only)

Supply version

0 = AC (50/60 Hz)/DC
8 = AC (50/60 Hz)

Combinations


Number of poles	Relay type	Socket type	Timer module
1	40.31	95.P3/95.03	86.30
1	40.61	95.P5/95.05	86.30
1	46.61	97.P1/97.01	86.30
2	40.52/44.52/44.62	95.P5/95.05	86.30
2	46.52	97.P2/97.02	86.30
2	55.32	94.P4/94.02	86.30
2	56.32	96.02	86.30
2	60.12	90.02	86.00/86.30
2	62.32	92.03	86.00/86.30
3	55.33	94.P3/94.03	86.30
3	60.13	90.03	86.00/86.30
3	62.33	92.03	86.00/86.30
4	55.34	94.P4/94.04	86.30
4	56.34	96.04	86.00/86.30

Other data Timer ATEX versions

Code available	Nominal voltage	Operating range	Use temperature
86.00.0.240.0073	12-48 V AC/DC	10.2...60 V AC/DC	-20...+50°C
86.30.0.024.0073	12-24 V AC/DC	9.6...33.6 V AC/DC	-20...+50°C

Markings - ATEX versions - ATEX, II 3G Ex ec IIC Gc








MARKING	
	Specific marking of explosion protection
II	Component for surface plant (different from mines)
3	Category 3: normal level of protection
GAS	G Explosive atmosphere due to presence of combustible gas vapour or mist
	Ex ec Increased security
	IIC Gas group
	Gc Equipment Protection Level
-20 °C ≤ Ta ≤ +50 °C Ambient temperature	
EPTI 17 ATEX 0264 U EPTI: laboratory which issues the CE type certificate 17: year of issue of certificate 0264: number of CE type certificate	
U: ATEX component	

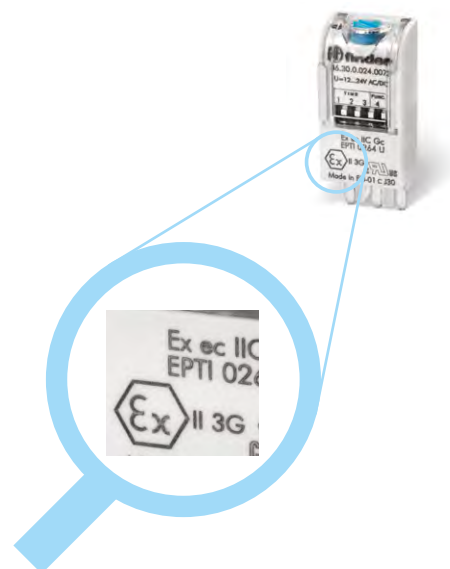

Technical data

EMC specifications				
Type of test		Reference standard	86.00	86.30
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV	n.a.
	air discharge	EN 61000-4-2	8 kV	8 kV
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)		EN 61000-4-3	10 V/m	10 V/m
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals		EN 61000-4-4	4 kV	2 kV
Surges (1.2/50 µs) on Supply terminals	common mode	EN 61000-4-5	4 kV	2 kV
	differential mode	EN 61000-4-5	4 kV	1 kV
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals		EN 61000-4-6	10 V	10 V
Radiated and conducted emission		EN55022	class B	class B
Other data		86.00	86.30	
Current absorption on signal control (B1)		mA	1	—
Power lost to the environment	without contact current	W	0.1 (12 V) - 1 (230 V)	0.2
	with rated current		See 56, 60 and 62 series relays	See 40, 44, 46, 55, 56, 60, 62 series relays

Times scales

						
(0.05...1)s	(0.5...10)s	(5...100)s	(0.5...10)min	(5...100)min	(0.5...10)h	(5...100)h


NOTE: Time scales and functions must be set before energising the timer.

To achieve the minimum time setting of 0.05 seconds it is necessary to use one of the functions with control signal.


When setting very short times it may be necessary to take into account the operate time of the relay used.

Outline drawings

Type 86.00



Type 86.30



H

Functions

U = Supply voltage**S** = Signal switch

— = Output contact


LED Type 86.00	LED Type 86.30	Supply voltage	NO output contact
		OFF	Open
		ON	Open
		ON	Open (Timing in Progress)
		ON	Closed

Without control signal = Start via contact in supply line (A1).


With control signal = Start via contact into control terminal (B1).

Wiring diagram


Without control signal




Type 86.00

**(AI) On-delay.**

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.


**(DI) Interval.**

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.


**(SW) Symmetrical flasher (starting pulse on).**

Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).


With control signal




* With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1). Switch S should be exclusively used to provide the control signal to terminal B1. (Do not connect any other load at this point).

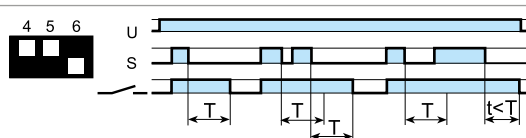**(BE) Off-delay with control signal.**


Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

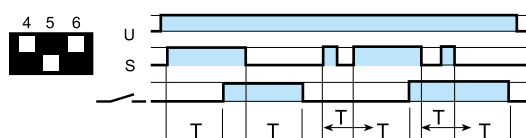**(CE) On- and off-delay with control signal.**


Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay, after which time the output contacts transfer. Opening the Signal switch initiates the same preset delay, after which time the output contacts reset.

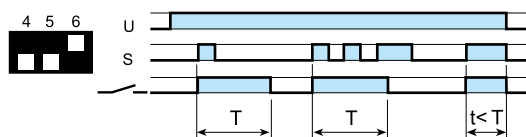**(DE) Interval with control signal on.**

Power is permanently applied to the timer. On momentary or maintained closure of Signal Switch (S), the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

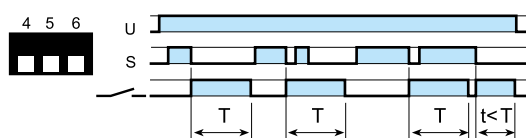
**(EE) Interval with control signal off.**

Power is permanently applied to the timer. On opening of the Signal Switch (S) the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

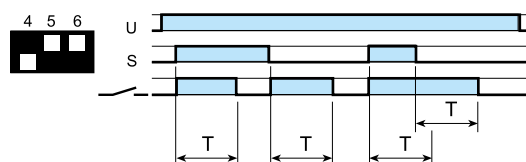**(FE) Interval with control signal on and off.**

Power is permanently applied to the timer. Both the opening and closing of the Signal Switch (S) initiates the transfer of the output contacts. In both instances the contacts reset after the delay period has elapsed.


Wiring diagram




Type 86.30

**(AI) On-delay.**

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.

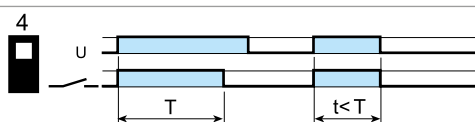**(DI) Interval.**

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.





90.03

Approvals

(according to type):



Screw terminal (Box clamp) socket panel or 35 mm rail (EN 60715) mount	90.02 Blue	90.02.0 Black	90.03 Blue	90.03.0 Black
For relay type	60.12		60.13	
Accessories				
Metal retaining clip	090.33			
6-way jumper link	090.06			
Identification tag	090.00.2			
Timer module	86.00, 86.30			
Technical data				
Double terminal A1 (for easy start connection)	—			
Rated values	10 A - 250 V			
Dielectric strength	2 kV AC			
Protection category	IP 20			
Ambient temperature	°C -40...+70			
Screw torque	Nm 0.6			
Wire strip length	mm 10			
Max. wire size for 90.02 and 90.03 sockets	solid wire		stranded wire	
	mm ² 1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG 1 x 10 / 2 x 14		1 x 12 / 2 x 14	

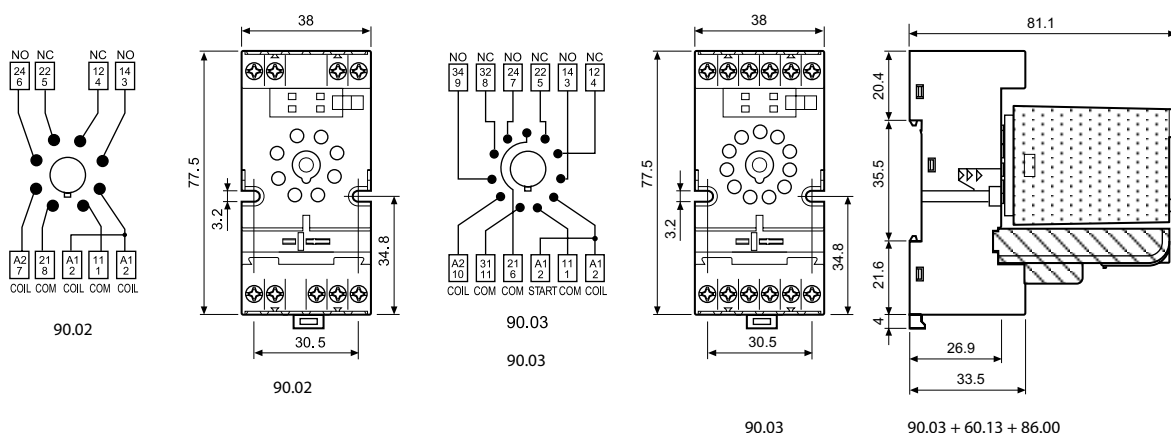


090.06

Approvals

(according to type):






6-way jumper link for 90.02 and 90.03 sockets	090.06
Rated values	10 A - 250 V

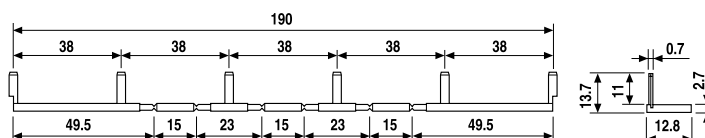

**92.03**Approvals
(according to type):

Screw terminal (Box clamp) socket		92.03	92.03.0
panel or 35 mm rail (EN 60715) mount		Blue	Black
For relay type		62.32, 62.33	
Accessories			
Metal retaining clip (supplied with socket - packaging code SMA)		092.71	
Identification tag		092.00.2	
Timer modules		86.00, 86.30	
Technical data			
Rated values		16 A - 250 V	
Dielectric strength		6 kV (1.2/50 µs) between coil and contacts	
Protection category		IP 20	
Ambient temperature		°C -40...+70 (see diagram L92)	
Screw torque		Nm	0.8
Wire strip length		mm	10
Max. wire size for 92.03 socket		solid wire	stranded wire
		mm ²	1 x 10 / 2 x 4
		AWG	1 x 8 / 2 x 12

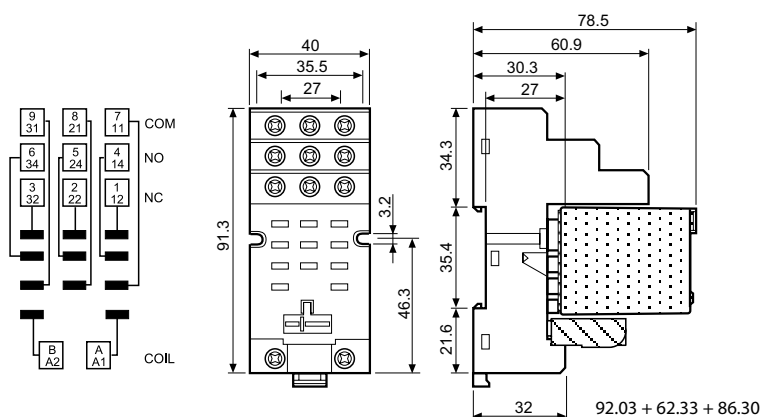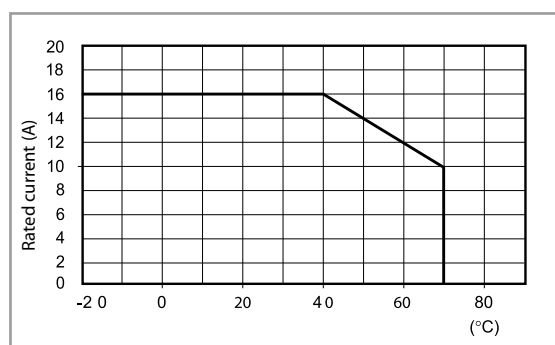L 92 - Rated current v ambient temperature



94.P4

Approvals
(according to type):



Certain relay/socket combinations



094.91.3



060.48

Push-in terminal socket panel or 35 mm (EN 60715) rail mount

For relay type

Accessories

Metal retaining clip

Plastic retaining and release clip

(supplied with socket - packaging code SPA)

6-way jumper link

Identification tag

2-way jumper link

2-way jumper link

Marker tag holder

Timer modules (see table below)

Sheet of marker tags for plastic retaining and release clip 094.91.3 and for marker tag holder 097.00, 48 tags, 6 x 12 mm for CEMBRE thermal transfer printers

Technical data

Rated values

Dielectric strength

Protection category

Ambient temperature

Wire strip length

Min. wire size for 94.P3 and 94.P4 sockets

Max. wire size for 94.P3 and 94.P4 sockets

94.P3
Blue

55.33

94.P4
Blue

55.32, 55.34

094.71

094.91.3

094.56

094.00.4

094.52.1

097.52

097.00

86.30

060.48

10 A - 250 V

2 kV AC

IP 20

°C -40...+70

mm 8

solid wire

mm² 0.5

AWG 21

solid wire

mm² 2 x 1.5 / 1 x 2.5

AWG 2 x 18 / 1 x 14

stranded wire


0.5

21

stranded wire

2 x 1.5 / 1 x 2.5

2 x 18 / 1 x 14

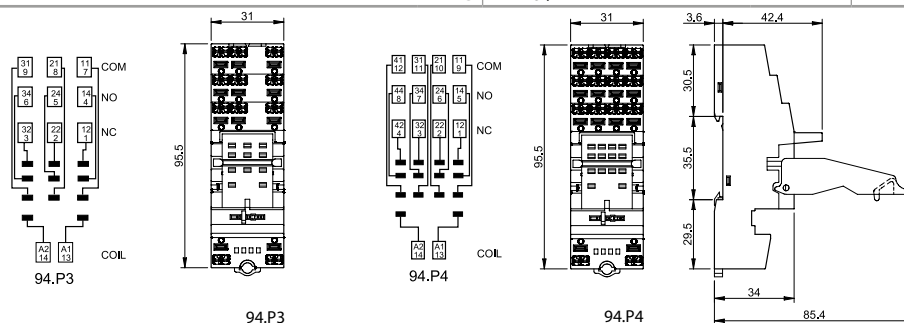


6-way jumper link for 94.P3 and 94.P4 sockets

Rated values

094.56 (blue)

10 A - 250 V




2-way jumper link for 94.P3 and 94.P4 sockets

Rated values

094.52.1

10 A - 250 V




2-way jumper link for 94.P3 and 94.P4 sockets


Rated values

097.52

10 A - 250 V



Marker tag holder for 94.P3 and 94.P4 sockets



097.00

86 series timer modules

(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)

(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)

(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.0.024.0000

86.30.8.120.0000

86.30.8.240.0000

Approvals (according to type):

097.00



86.30




94.04

Approvals
(according to type):

cULus

Certain relay/socket
combinations

094.91.3



060.48

Screw terminal (Box clamp) socket panel or 35 mm (EN 60715) rail mount

For relay type

94.02
Blue**94.02.0**
Black**94.03**
Blue**94.03.0**
Black**94.04**
Blue**94.04.0**
Black

55.32

55.33

55.32, 55.34

Accessories

Metal retaining clip

094.71

Plastic retaining and release clip
(supplied with socket - packaging code SPA)

094.91.3

094.91.30

094.91.3

094.91.30

094.91.3

094.91.30

6-way jumper link

094.06

094.06.0

094.06

094.06.0

094.06

094.06.0

Identification tag

094.00.4

Marker tag holder

097.00

Timer modules (see table below)

86.30

Sheet of marker tags for plastic retaining and release clip
094.91.3 and for marker tag holder 097.00, 48 tags, 6 x 12 mm
for CEMBRE thermal transfer printers

060.48

Technical data

Rated values

10 A - 250 V

Dielectric strength

2 kV AC

Protection category

IP 20

Ambient temperature

°C -40...+70

Screw torque

Nm

0.5

Wire strip length

mm

8

Max. wire size for 94.02/03/04 sockets

solid wire

stranded wire

mm²


1 x 6 / 2 x 2.5

1 x 4 / 2 x 2.5


AWG

1 x 10 / 2 x 14


1 x 12 / 2 x 14




94.02




94.02




94.03



94.03



94.04

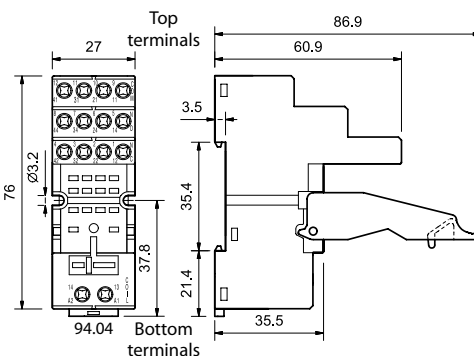

94.04


6-way jumper link for 94.02, 94.03 and 94.04 sockets

Rated values


094.06 (blue)

094.06.0 (black)

10 A - 250 V



094.06



86.30

86 series timer modules

(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.0.024.0000

(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.8.120.0000

(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.8.240.0000

Approvals (according to type):






95.P5

Approvals
(according to type):



095.91.3



060.48

Push-in terminals socket panel or 35 mm rail mount

For relay type

95.P3

40.31

95.P5

40.51/ 52/ 61, 44.52/62

Accessories

Metal retaining clip

095.71

Plastic retaining and release clip
(supplied with socket - packaging code SPA)

095.91.3

8-way jumper link

097.58

2-way jumper link (12.5 mm pitch)

097.52

2-way jumper link (4.6 mm pitch)

097.42

Marker tag holder (for tags 060.48 type)

097.00

Timer modules (see table below)

86.30

Identification tag

095.00.4

Sheet of marker tags for plastic retaining and release clip
095.91.3 and for marker tag holder 097.00, 48 tags,
6 x 12 mm, for CEMBRE thermal transfert printer

060.48

Technical data

Rated values

10 A - 250 V*

Dielectric strength

6 kV (1.2/50 µs) between coil and contacts

Protection category

IP 20

Ambient temperature

°C -40...+70 (see diagram L95)

Wire strip length

mm 8

Min. wire size for 95.P3 and 95.P5 sockets

solid wire

stranded wire

mm² 0.5

0.5

AWG 21

21

Max. wire size for 95.P3 and 95.P5 sockets

solid wire

stranded wire

mm² 2 x 1.5 / 1 x 2.5

2 x 1.5 / 1 x 2.5




AWG 2 x 18 / 1 x 14

2 x 18 / 1 x 14

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

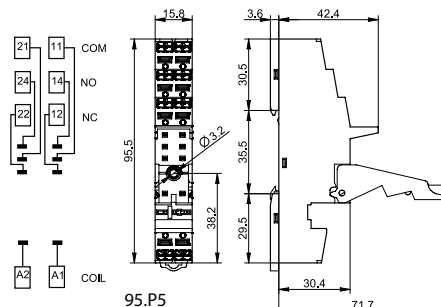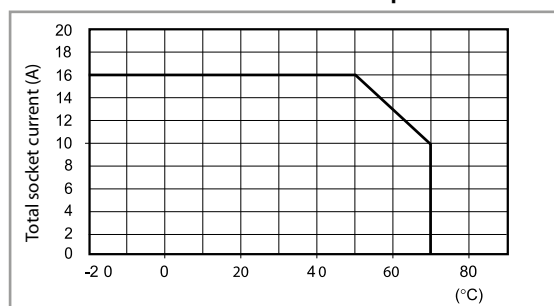

097.58



097.52



097.42



097.00




86.30

8-way jumper link for 95.P3 and 95.P5 sockets

Rated values

097.58

10 A - 250 V




2-way jumper link for 95.P3 and 95.P5 sockets

Rated values

097.52

10 A - 250 V




2-way jumper link for 95.P3 and 95.P5 sockets

Rated values

097.42


10 A - 250 V



Marker tag holder for 95.P3 and 95.P5 sockets

Rated values

097.00



86 series timer modules

(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.0.024.0000

(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.8.120.0000

(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.8.240.0000

Approvals (according to type):





95.05
Approvals
(according to type):




cUL US

cUL US Certain relay/socket combinations



95.01







060.48

Screw terminal (Box clamp) socket panel or 35 mm rail mount		95.03 (blue)	95.03.0 (black)	95.05 (blue)	95.05.0 (black)
For relay type		40.31		40.51, 40.52, 40.61	
Accessories					
Metal retaining clip		095.71			
Plastic retaining and release clip (supplied with socket - packaging code SPA)		095.01	095.01.0	095.01	095.01.0
8-way jumper link		095.18	095.18.0	095.18	095.18.0
Marker tag holder (for tags 060.48 type)		097.00			
Identification tag		095.00.4			
Timer modules (see table below)		86.30			
Sheet of marker tags for plastic retaining and release clip 095.01 and for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfer printers		060.48			
Technical data					
Rated values		10 A - 250 V*			
Dielectric strength		6 kV (1.2/50 µs) between coil and contacts			
Protection category		IP 20			
Ambient temperature		°C -40...+70 (see diagram L95)			
Screw torque		Nm	0.5		
Wire strip length		mm	8		
Max. wire size for 95.03 and 95.05 sockets		solid wire		stranded wire	
		mm ²	1 x 6 / 2 x 2.5	1 x 4 / 2 x 2.5	
		AWG	1 x 10 / 2 x 14	1 x 12 / 2 x 14	


* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

L 95 - Total socket current v ambient temperature

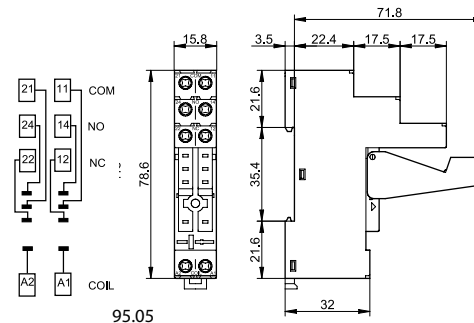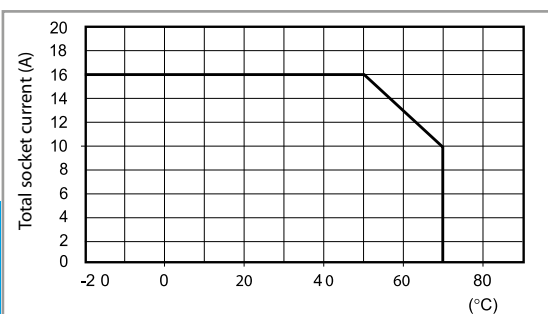

95.18

8-way jumper link for 95.03 and 95.05 sockets	095.18 (blue)	095.18.0 (black)
Rated values	10 A - 250 V	



86 series timer modules	
(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.0.024.0000
(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.120.0000
(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.240.0000

Approvals (according to type):



86.30



96.02

Approvals
(according to type):




96.04

Approvals
(according to type):




094.91.3


Screw terminal (Box clamp) socket panel or 35 mm rail (EN 60715) mount	96.02 Blue	96.02.0 Black	96.04 Blue	96.04.0 Black
For relay type	56.32		56.34	
Accessories				
Metal retaining clip (supplied with socket - packaging code SMA)	094.71		096.71	
Plastic retaining and release clip (supplied with socket - packaging code SPA)	094.91.3	094.91.30	—	—
6-way jumper link	094.06	094.06.0	—	—
Identification tag	095.00.4		090.00.2	
Timer modules	86.30		86.00, 86.30	
Technical data				
Rated values	12 A - 250 V			
Dielectric strength	2 kV AC			
Protection category	IP 20			
Ambient temperature	°C -40...+70			
Screw torque	Nm	0.8		
Wire strip length	mm	8		
Max. wire size for 96.02/04 sockets		solid wire	stranded wire	
	mm ²	1 x 6 / 2 x 2.5	1 x 4 / 2 x 2.5	
	AWG	1 x 10 / 2 x 14	1 x 12 / 2 x 14	



96.02




96.04

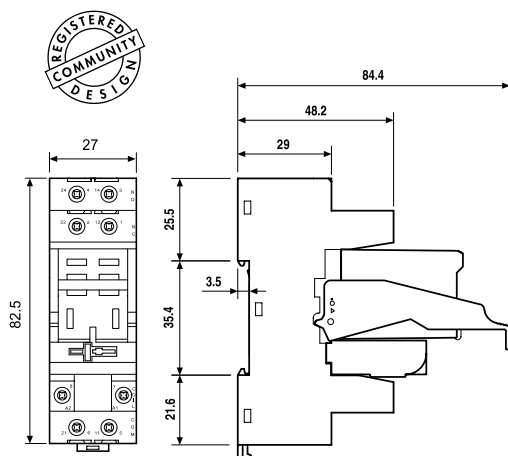


96.02

96.02 + 56.32 + 094.91.3 + 86.30

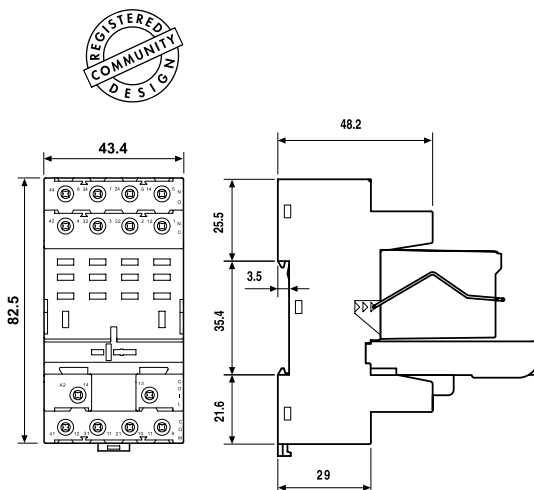


96.04

96.04 + 56.34 + 096.71 + 86.00



094.06

6-way jumper link for 96.02 socket	094.06 (blue)	094.06.0 (black)
Rated values	10 A - 250 V	

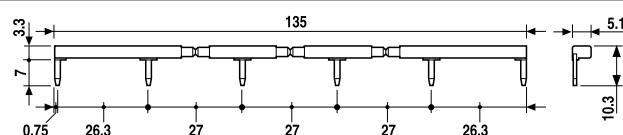




97.P2

Approvals
(according to type):



097.01



060.48

Push-in terminal socket panel or 35 mm rail (EN 60715) mount

For relay type

97.P1

97.P2

46.61

46.52

Accessories

Plastic retaining and release clip
(supplied with socket - packaging code SPA)

097.01

Metal retaining clip

097.71

Identification tag

095.00.4

8-way jumper link

097.58

2-way jumper link

097.52

2-way jumper link

097.42

Marker tag holder

097.00

Timer modules (see table below)

86.30

Sheet of marker tags for marker tag holder 097.00, 48 tags,
6 x 12 mm, for CEMBRE thermal transfer printers

060.48

Technical data

Rated values

16 A-250 V AC

8 A-250 V AC

Dielectric strength

6 kV (1.2/50 µs) between coil and contacts

Protection category

IP 20

Ambient temperature

°C -40...+70 (see diagram L97)

Wire strip length

mm 8

Min. wire size for 97.P1 and 97.P2 socket

solid wire

stranded wire

mm² 0.5

0.5

AWG 21

21

Max. wire size for 97.P1 and 97.P2 socket

solid wire

stranded wire



mm² 2 x 1.5 / 1 x 2.5

2 x 1.5 / 1 x 2.5


AWG 2 x 18 / 1 x 14

2 x 18 / 1 x 14

L 97 - Rated current v ambient temperature

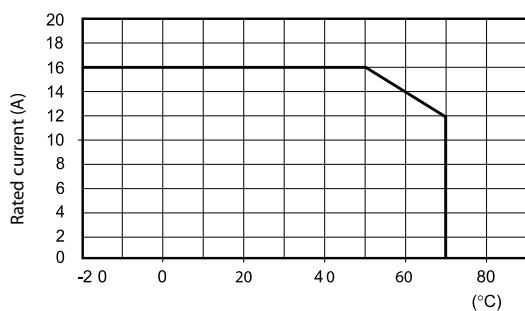

97.P1

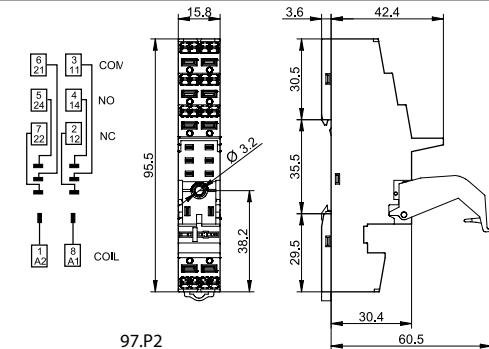


97.P2

8-way jumper link for 97.P1 and 97.P2 sockets

097.58

Rated values

10 A - 250 V




2-way jumper link for 97.P1 and 97.P2 sockets

097.52

Rated values

10 A - 250 V




2-way jumper link for 97.P1 and 97.P2 sockets

097.42


Rated values

10 A - 250 V



Marker tag holder for 95.P3 and 95.P5 sockets

097.00



86 series timer modules

(12...24) V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.0.024.0000

(110...125) V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.8.120.0000

(230...240) V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.8.240.0000

Approvals (according to type):



097.58



097.52




097.42



097.00



86.30



97.01

Approvals

(according to type):



097.01

Screw terminal socket

panel or 35 mm rail (EN 60715) mount

For relay type

97.01

Blue

46.61

97.02

Blue

46.52

Accessories

Plastic retain and eject clip
(supplied with socket - packaging code SPA)

097.01

8-way jumper link

095.18 (blue)

095.18.0 (black)

Identification tag

095.00.4

Timer modules

86.30

Technical data

Rated current

16 A - 250 V AC

8 A - 250 V AC

Dielectric strength

6 kV (1.2/50 μ s) between coil and contacts

Protection category

IP 20

Ambient temperature

°C -40...+70 (see diagram L97)

Screw torque

Nm 0.8

Wire strip length

mm 8

Max. wire size for 97.01 and 97.02 sockets

solid wire

stranded wire

mm² 1 x 6 / 2 x 2.5



1 x 4 / 2 x 2.5

AWG 1 x 10 / 2 x 14

1 x 12 / 2 x 14

L 97 - Rated current v ambient temperature

(for 46.61 relay / 97.01 socket combination)

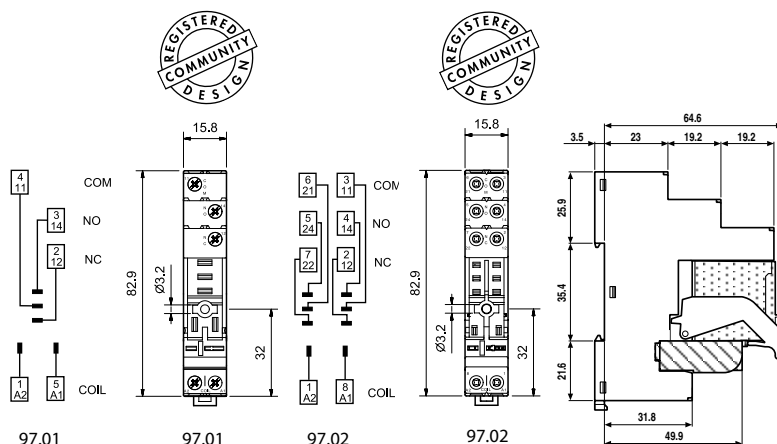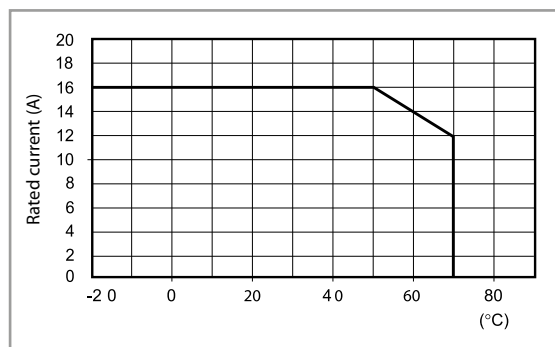

97.02 + 46.52 + 097.01
+ 86.30



095.18

8-way jumper link for 97.01 and 97.02 sockets

Rated values

095.18 (blue)

095.18.0 (black)

10 A - 250 V

