


A



92.03

Approvals
(according to type):**Screw terminal (Box clamp) socket**
panel or 35 mm rail (EN 60715) mount

For relay type

AccessoriesMetal retaining clip
(supplied with socket - packaging code SMA)

Identification tag

Modules (see table below)

Timer modules (see table below)

Technical data

Rated values

Dielectric strength

Protection category

Ambient temperature

Screw torque

Wire strip length

Max. wire size for 92.03 socket

92.03
Blue

62.31, 62.32, 62.33

92.03.0
Black

16 A - 250 V

6 kV (1.2/50 µs) between coil and contacts

IP 20

°C -40...+70 (see diagram L92)

Nm

mm

solid wire




mm² 1 x 10 / 2 x 4

AWG 1 x 8 / 2 x 12

stranded wire

1 x 6 / 2 x 4

1 x 10 / 2 x 12

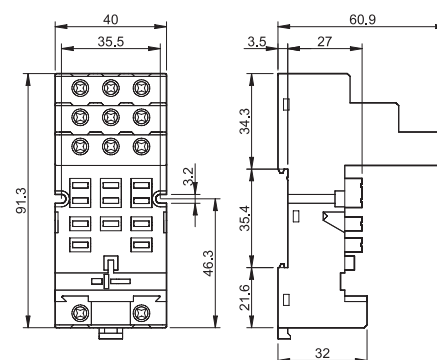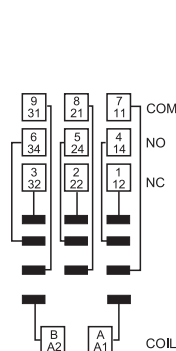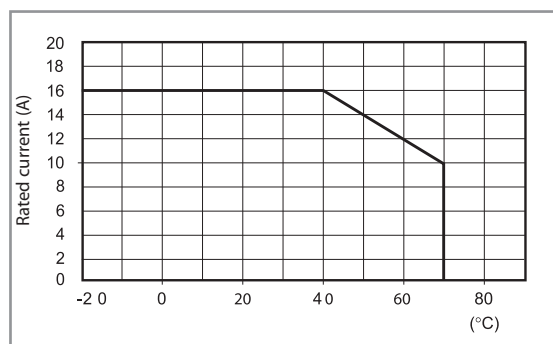L 92 - Rated current v ambient temperature

86.00



86.30



99.02

Approvals
(according to type):DC Modules with
non-standard polarity
(+A2) on request.**86 series timer modules**

Multi-voltage: (12...240)V AC/DC;

Multi-functions: AI, DI, SW, BE, CE, DE, EE, FE; (0.05 s...100 h)

(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)

(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)

(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.00.0.240.0000

86.30.0.024.0000

86.30.8.120.0000

86.30.8.240.0000

Approvals

(according to type):

99.02 coil indication and EMC suppression modules for 92.03 socket

Diode (+A1, standard polarity)

LED

LED

LED

LED + Diode (+A1, standard polarity)

LED + Diode (+A1, standard polarity)

LED + Diode (+A1, standard polarity)

LED + Varistor

LED + Varistor

LED + Varistor

RC circuit

RC circuit

RC circuit

Residual current by-pass

(6...220)V DC

(6...24)V DC/AC

(28...60)V DC/AC

(110...240)V DC/AC

(6...24)V DC

(28...60)V DC

(110...220)V DC

(6...24)V DC/AC

(28...60)V DC/AC

(110...240)V DC/AC

(6...24)V DC/AC

(28...60)V DC/AC

(110...240)V DC/AC

(110...240)V AC

99.02.3.000.00

99.02.0.024.59

99.02.0.060.59

99.02.0.230.59

99.02.9.024.99

99.02.9.060.99

99.02.9.220.99

99.02.0.024.98

99.02.0.060.98

99.02.0.230.98

99.02.0.024.09

99.02.0.060.09

99.02.0.230.09

99.02.8.230.07




92.13

Approvals
(according to type):



PCB socket	92.13 (blue)	92.13.0 (black)
For relay type	62.31, 62.32, 62.33	
Accessories		
Metal retaining clip (supplied with socket - packaging code SMA)	092.54	
Technical data		
Rated values	10 A - 250 V	
Dielectric strength	2.5 kV AC	
Ambient temperature	°C -40...+70	

A

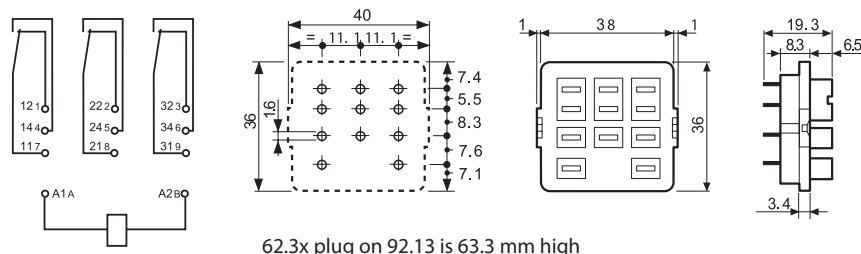


92.33

Approvals
(according to type):



Panel mount solder socket mounted with M3 screw	92.33 (blue)
For relay type	62.31, 62.32, 62.33
Accessories	
Metal retaining clip (supplied with socket - packaging code SMA)	092.54
Technical data	
Rated values	10 A - 250 V
Dielectric strength	2.5 kV AC
Ambient temperature	°C -40...+70

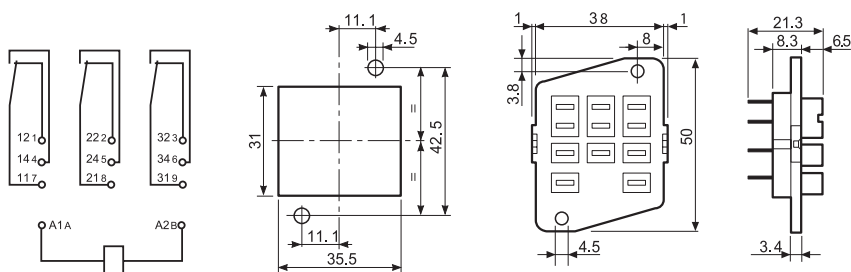

Packaging codes

How to code and identify retaining clip and packaging options for sockets.

Example:

