

Rittal – The System.

Faster – better – everywhere.

► TopTherm Filter Fan Units - 3237124

Date : Oct 08 , 2020

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Web: <https://www.bolenscontrol.com/> - Phone: (800) 658-5241 - Email: sales@bolenscontrol.com

TopTherm Filter Fan Units - 3237124

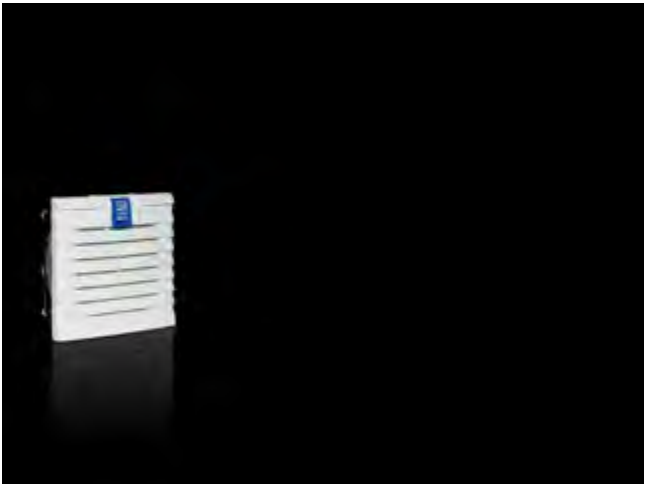

Product Description	
Air throughput with outlet filter, including standard filter mat (quantity x order number, throughput 50/60 Hz)	1 x 3237200: 15 m³/h
Rated operating voltage	24VDC
Rated current (max)	0.12 A
Miniature circuit-breaker/fuse	2A
Temperature range	Ambient temperature range: -15°C...+55°C Storage: -30°C...+70°C
Dimensions	Height: 116.5 mm (4.6 ") Width: 116.5 mm (4.6 ")
Required mounting cut-out	Height: 92 mm (3.6 ") Width: 92 mm (3.6 ")
Build depth	16 mm (0.63 ")
Installation depth	43 mm (1.7 ")
Color	RAL 7035
General color	RAL 7035
Protection category IP to IEC 60 529	Protection category IP: IP 54 with standard filter and hose-proof hood: IP 56
Protection category NEMA:	Protection category NEMA: NEMA 12 with hose-proof hood: NEMA 3R NEMA 3

Weight/packaging unit	0.3 kg (0.7 lb.)
Diagonal fan	Axial DC motor
Supply includes	Complete unit ready for connection including filter mat
Note	Electrical connection of the filter fans 3237.XXX is by means of 2 individual wires at the device for all other filter fans by means of a spring-type terminal.
Packaging unit	1 pc(s).
EAN	4028177651609
Customs tariff number	84145915
Product description (long)	SK fan and filter units TopTherm 20 m³/h 24 V (DC) WHD: 116.5 x 116.5 x 16 mm