

# Product data sheet

Specifications

SQUARE D



Contactor, Definite Purpose, 25A, 2 pole, 5 HP at 230 VAC, 1 phase, 208/240 VAC 60 Hz 220 VAC 50 Hz coil, open

8910DPA22V09

⚠ Discontinued

⚠ Discontinued on: 17 February 2021

⚠ End-of-service on: 17 February 2021

## Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	25 A
Number of Poles	2P
Pole contact composition	2 NO
Range of Product	DPA

## Complementary

Maximum Horse Power Rating	2 hp 115 V AC, 1 phase 5 hp 230 V AC, 1 phase
Locked rotor rated current	125 A 460 V AC 100 A 575 V AC 150 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	208...240 V AC 60 Hz 220 V AC 50 Hz
Phase	1 phase
Electrical Connection	Binder head Quick connect terminals

## Environment

Product certifications	UL Recognized CSA
------------------------	----------------------

## Ordering and shipping details

Category	21342-8910 DPA 2_(25 AMP)
Discount Schedule	CP1B
GTIN	785901738039
Nbr. of units in pkg.	1
Package weight(Lbs)	15.68 oz (444.521 g)
Returnability	No
Country of origin	CN

Web: <https://www.bolenscontrol.com/> - Phone: (800) 658-5241 - Email: [sales@bolenscontrol.com](mailto:sales@bolenscontrol.com)

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.50 in (6.35 cm)
Package 1 width	3.20 in (8.128 cm)
Package 1 Length	4.20 in (10.668 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	8
Package 2 Weight	8.58 lb(US) (3.892 kg)
Package 2 Height	7.00 in (17.78 cm)
Package 2 width	5.50 in (13.97 cm)
Package 2 Length	8.50 in (21.59 cm)


Offer Sustainability

EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.

Contractual warranty


Warranty	18 months
----------	-----------

Approximate Dimensions

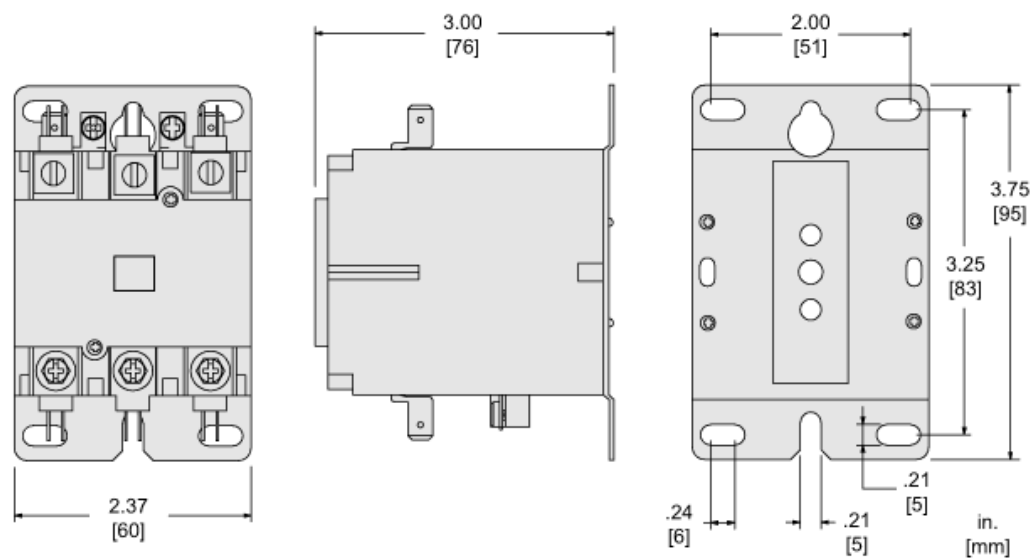

Recommended replacement(s)

8910DPA22V09 is replaced by:

1x		Contactor, Definite Purpose, 30A, 2 pole, 5 HP at 230 VAC, 1 phase, 208/240 VAC 60 Hz 220 VAC 50 Hz coil, open 8910DPA32V09
----	---	---