


Product data sheet

Specifications

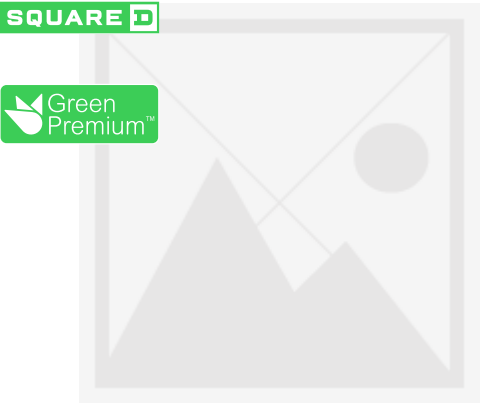

Limit switch, 9007, 600 VAC 12amp t +options

9007TUD5

Product availability : Stock - Normally stocked in distribution facility

Main

Device Application	Standard mill switch Universal mill switch Heavy duty
Range of Product	T
Series name	Severe duty

Complementary

[Ith] conventional free air thermal current	20 A
[Ui] rated insulation voltage	600 V
Base plate style	Style D
Body Material	Cast zinc
Contact code designation	P600 A600
Contacts material	Silver flashed copper
Contact operation	Snap action
Positive opening	Without
Switch actuation	CCW
Torque Value	12 lbf.in (1.36 N.m)

Environment

Electrical shock protection class	Class 0
IP Degree of Protection	IP67 IP66 IP65
NEMA Degree of Protection	NEMA 1/2/4/12/13
Product Certifications	CSA UL UL Listed CE
Protective treatment	Corrosion resistant gray paint
Shock resistance	30 gn
Standards	UL 508

Web: <https://www.bolenscontrol.com/> - Phone: (800) 658-5241 - Email: sales@bolenscontrol.com

Ordering and shipping details

Category	21497-9007 FT,T OILTIGHT AND FOUNDRY
Discount Schedule	DS1
GTIN	785901752301
Nbr. of units in pkg.	1
Package weight(Lbs)	2.50 lb(US) (1.134 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.90 in (7.366 cm)
Package 1 width	2.50 in (6.35 cm)
Package 1 Length	5.30 in (13.462 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to P65Warnings website
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------