

# Product data sheet

Specifications



## Linergy FT - Comb busbar - 63 A - 4 tap-offs - 54 mm pitch



GV2G454

Product availability : Stock - Normally stocked in distribution facility

### Main

|                                             |                                            |
|---------------------------------------------|--------------------------------------------|
| Range                                       | Linergy                                    |
| Product name                                | FT                                         |
| Device short name                           | GV2G                                       |
| Product or Component Type                   | Comb busbar                                |
| Accessory / separate part category          | Connection accessory                       |
| Poles description                           | 3P                                         |
| Range compatibility                         | TeSys D<br>TeSys GV2<br>TeSys K<br>TeSys U |
| Number of tap-offs                          | 4                                          |
| [Ith] conventional free air thermal current | 63 A                                       |
| Connection pitch                            | 2.13 in (54 mm)                            |

### Complementary

|                               |                        |
|-------------------------------|------------------------|
| Mounting Location             | On terminal            |
| [Ui] rated insulation voltage | 690 V                  |
| Length                        | 8.11 in (206 mm)       |
| Net weight                    | 0.19 lb(US) (0.085 kg) |

### Ordering and shipping details

|                       |                                  |
|-----------------------|----------------------------------|
| Category              | 22367-MANUAL STR PROTECTOR - GV2 |
| Discount Schedule     | I11                              |
| GTIN                  | 3389110555875                    |
| Nbr. of units in pkg. | 1                                |
| Package weight(Lbs)   | 3.10 oz (88 g)                   |
| Returnability         | Yes                              |
| Country of origin     | RO                               |

Web: <https://www.bolenscontrol.com/> - Phone: (800) 658-5241 - Email: [sales@bolenscontrol.com](mailto:sales@bolenscontrol.com)

Packing Units

|                              |                          |
|------------------------------|--------------------------|
| Unit Type of Package 1       | PCE                      |
| Package 1 Height             | 0.59 in (1.5 cm)         |
| Package 1 width              | 1.57 in (4 cm)           |
| Package 1 Length             | 8.27 in (21 cm)          |
| Unit Type of Package 2       | S01                      |
| Number of Units in Package 2 | 50                       |
| Package 2 Weight             | 9.96 lb(US) (4.519 kg)   |
| Package 2 Height             | 5.91 in (15 cm)          |
| Package 2 width              | 5.91 in (15 cm)          |
| Package 2 Length             | 15.75 in (40 cm)         |
| Unit Type of Package 3       | P06                      |
| Number of Units in Package 3 | 1600                     |
| Package 3 Weight             | 345.02 lb(US) (156.5 kg) |
| Package 3 Height             | 29.53 in (75 cm)         |
| Package 3 width              | 23.62 in (60 cm)         |
| Package 3 Length             | 31.50 in (80 cm)         |

Offer Sustainability

|                            |                                                  |
|----------------------------|--------------------------------------------------|
| Sustainable offer status   | Green Premium product                            |
| REACH Regulation           | <a href="#">REACH Declaration</a>                |
| REACH free of SVHC         | Yes                                              |
| EU RoHS Directive          | Compliant<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free     | Yes                                              |
| Mercury free               | Yes                                              |
| RoHS exemption information | <a href="#">Yes</a>                              |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>           |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>    |

Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Product data sheet

Dimensions Drawings

GV2G454

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

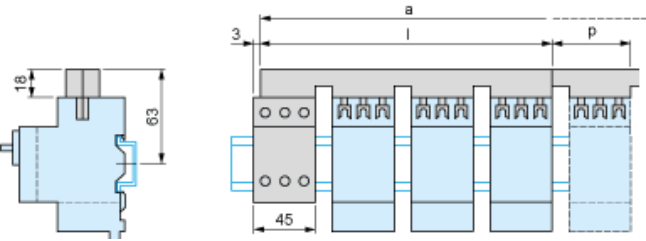

|                     |  | l   | p  |  |
|---------------------|--|-----|----|--|
| GV2G445 (4 x 45 mm) |  | 179 | 45 |  |
| GV2G454 (4 x 54 mm) |  | 206 | 54 |  |
| GV2G472 (4 x 72 mm) |  | 260 | 72 |  |

| Number of tap-offs | a   |     |     |     |
|--------------------|-----|-----|-----|-----|
|                    | 5   | 6   | 7   | 8   |
| GV2G445            | 224 | 269 | 314 | 359 |
| GV2G454            | 260 | 314 | 368 | 422 |
| GV2G472            | 332 | 404 | 476 | 548 |