


# Product data sheet

Specifications

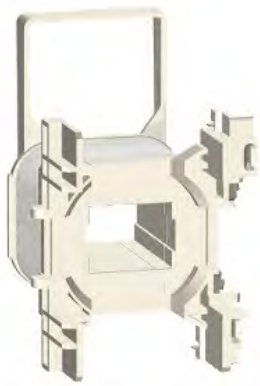

## Contactor coil, TeSys Deca, 120 V AC 60 Hz, for contactors D40A-D80A DT60A-DT80A

LXD3G7

Product availability : Stock - Normally stocked in distribution facility

### Main

Range	TeSys
Product or Component Type	Contactor coil
Device short name	LXD3
Control circuit type	AC 60 Hz
[Uc] control circuit voltage	120 V AC 60 Hz
Average resistance	37.63 Ohm 68 °F (20 °C)
Inductance of closed circuit	2.07 H
Product Compatibility	LC1D40A...D80A LC2D40A...D80A LC1DT60A...DT80A
Mechanical durability	6 Mcycles
Maximum operating rate	3600 cyc/h 140 °F (60 °C)

### Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Drop-out 0.3...0.6 Uc 60 Hz 140 °F (60 °C)) Operational 0.85...1.1 Uc 60 Hz 140 °F (60 °C))
Inrush power in VA	160 VA 60 Hz 0.75 68 °F (20 °C))
Hold-in power consumption in VA	15 VA 60 Hz 0.3 68 °F (20 °C))
Heat dissipation	4...5 W 60 Hz

### Environment

Ambient Air Temperature for Operation	23...140 °F (-5...60 °C)
Net weight	0.15 lb(US) (0.07 kg)

### Ordering and shipping details

Category	22341 - CONTACTOR,D,K,&F ACCESS
Discount Schedule	I12
GTIN	3389119410373

Web: <https://www.bolenscontrol.com/> - Phone: (800) 658-5241 - Email: [sales@bolenscontrol.com](mailto:sales@bolenscontrol.com)

Nbr. of units in pkg.	1
Package weight(Lbs)	5.64 oz (160 g)
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.28 in (5.8 cm)
Package 1 width	2.28 in (5.8 cm)
Package 1 Length	3.86 in (9.8 cm)
Unit Type of Package 2	S01
Number of Units in Package 2	12
Package 2 Weight	4.73 lb(US) (2.145 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	5.91 in (15 cm)
Package 2 Length	15.75 in (40 cm)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to P65Warnings website
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------