# **Product data sheet**

Specifications







# Mini circuit breaker, QOU, 60A, 3 pole, 240VAC, 10kA

**QOU360** 

Product availability: Stock - Normally stocked in distribution facility

#### Main

| Product or Component Type   | Miniature circuit-breaker     |
|-----------------------------|-------------------------------|
| Range of Product            | QOU                           |
| Circuit breaker type        | Standard                      |
| Circuit breaker application | HACR and Switching Duty rated |

### Complementary

| •                              |  |
|--------------------------------|--|
| Line Rated Current             | 60 A   |
| Electrical connection          | Slotted box lugs, line side<br>Slotted box lugs, load side |
| [Ue] rated operational voltage | 120/240 V AC<br>240 V AC<br>120 V AC<br>48 V DC            |
| Mounting Mode                  | Unit mount   |
| AWG gauge                      | AWG 14AWG 2 aluminium/copper                               |
| Height                         | 4.05 in (102.87 mm)  |
| Width                          | 2.25 in (57.15 mm)   |
| Depth                          | 2.95 in (74.93 mm)   |
| Tightening torque              | 45 lbf.in (5.08 N.m) (AWG 14AWG 2)                         |
|                                |  |

### **Environment**

| Product certifications | IEC<br>CSA<br>UL Listed |
|------------------------|-------------------------|
|------------------------|-------------------------|

## Ordering and shipping details

| Category              | 00900-QOU BREAKERS & SWITCH |
|-----------------------|-----------------------------|
| Discount Schedule     | DE2                         |
| GTIN                  | 785901060291                |
| Nbr. of units in pkg. | 1                           |
| Package weight(Lbs)   | 18.40 oz (521.631 g)        |
| Returnability         | Yes                         |

Web: https://www.bolenscontrol.com/ - Phone: (800) 658-5241 - Email: sales@bolenscontrol.com


1

| Country of origin            | MX   |
|------------------------------|--|
| Packing Units                |  |
| Unit Type of Package 1       | PCE  |
| Package 1 Height             | 3.60 in (9.144 cm)   |
| Package 1 width              | 4.70 in (11.938 cm)  |
| Package 1 Length             | 2.60 in (6.604 cm)   |
| Unit Type of Package 2       | CAR  |
| Number of Units in Package 2 | 20   |
| Package 2 Weight             | 23.20 lb(US) (10.523 kg)   |
| Package 2 Height             | 3.50 in (8.89 cm)  |
| Package 2 width              | 13.50 in (34.29 cm)  |
| Package 2 Length             | 20.40 in (51.816 cm)   |
| Offen Custeinshilitu         |  |
| Offer Sustainability         |  |
| Sustainable offer status     | Green Premium product  |
| California proposition 65    | WARNING: This product can expose you to chemicals including: Cadmium and cadmium compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm For more information go to P65Warnings <code>website</code> |
| REACh Regulation             | REACh Declaration  |
| EU RoHS Directive            | Compliant EU RoHS Declaration  |
| Mercury free                 | Yes  |
| RoHS exemption information   | Yes  |
| China RoHS Regulation        | China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.  |
| Halogen content performance  | Halogen free product   |
| Contractual warranty         |  |

18 months

Warranty

#### **Dimensions**

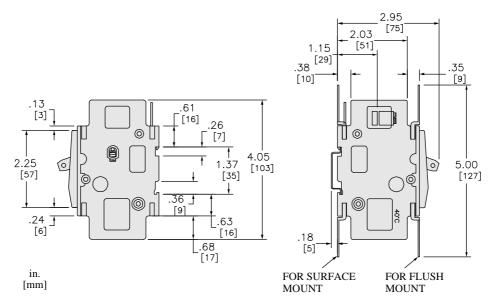

2.50 [64] MIN. WIRE BENDING
SPACE FOR 2 AWG
1.50 [38] MIN. WIRE BENDING
SPACE FOR 14 AWG
TYP. BOTH ENDS FOR ALL CB'S SHOWN PER ARTICLE 430-1-(B) NEC [DIMENSIONAL EXAMPLE ONLY BELOW] [57] SEE [38] DETAIL A [19] .75 [19] .75 . .75 WIRING [19] [19] BENDING SPACE 1.18 .43 [11] [30] .16 [4] 15 .76 [19] .75 1.18 [19] [30] .62 [16] DETAIL A [54] 35 X .30 DIN RAIL [889] [8]

Dimensions are approximate. Refer to technical documentation for additional detail.