## **Product data sheet**

Specifications

SQUARE D





# Mini circuit breaker, QOU, 70A, 3 pole, 240 VAC, 10kA

QOU370

Product availability : Stock - Normally stocked in distribution facility

#### Main

Product or Component Type	Miniature circuit-breaker
Range of Product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR and Switching Duty rated

#### Complementary

Line Rated Current	70 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 240 V AC 120 V AC 60 V DC
Mounting Mode	Unit mount
AWG gauge	AWG 12AWG 2/0 aluminium/copper
Height	4.05 in (102.87 mm)
Width	2.25 in (57.15 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14AWG 2)

#### **Environment**

Product Certifications	CSA UL Listed IEC
------------------------	-------------------------


### Ordering and shipping details

00900-QOU BREAKERS & SWITCH
DE2
785901060307
1
23.20 oz (657.709 g)
Yes

Web: https://www.bolenscontrol.com/ - Phone: (800) 658-5241 - Email: sales@bolenscontrol.com

Country of origin	MX
Packing Units	
Unit Type of Package 1	PCE
Package 1 Height	2.60 in (6.604 cm)
Package 1 width	3.50 in (8.89 cm)
Package 1 Length	4.80 in (12.192 cm)
Offer Sustainability	
Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Cadmium and cadmium compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm For more information go to P65Warnings website
REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Halogen content performance	Halogen free product
Contractual warranty	
	18 months

#### **Dimensions**

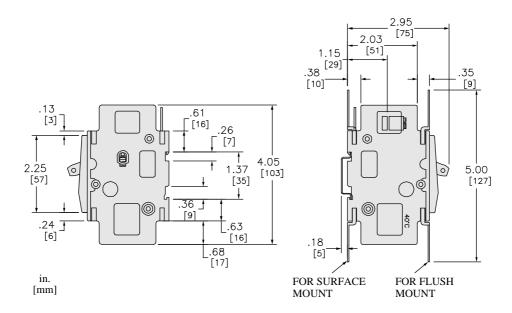

2.50 [64] MIN. WIRE BENDING
SPACE FOR 2 AWG
1.50 [38] MIN. WIRE BENDING
SPACE FOR 14 AWG
TYP. BOTH ENDS FOR ALL CB'S SHOWN
PER ARTICLE 430-1-(B) NEC
ONLY BELOW]

1.50
[38]

2.25
[57]

