


3-phase busbars Modular spacing 45 mm for 2 switches Fork shape connections

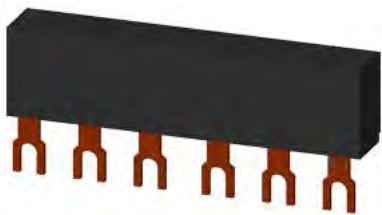

General technical data

protection class IP on the front acc. to IEC 60529		IP20
touch protection on the front acc. to IEC 60529		finger-safe, for vertical contact from the front

Installation/ mounting/ dimensions

operational current rated value	A	63
number of poles for main current circuit		3
type of electrical connection for main current circuit		screw-type terminals



Certificates/ approvals

General Product Approval			Declaration of Conformity	Test Certificates
			<u>Miscellaneous</u>	<u>Special Test Certificate</u>

Test Certificates Marine / Shipping

					
---	---	---	---	---	---

Marine / Shipping other

	
---	---

Further information

