












3-phase busbar for 2 circuit breakers Size S2 Modular
spacing: 55 mm



General technical data		
protection class IP on the front acc. to IEC 60529		IP20
touch protection on the front acc. to IEC 60529		finger-safe, for vertical contact from the front
Installation/ mounting/ dimensions		
operational current rated value	A	108
number of poles for main current circuit		3
type of electrical connection for main current circuit		screw-type terminals
Certificates/ approvals		
General Product Approval	Declaration of Conformity	Test Certificates
 CSA	 UL	
	<u>Miscellaneous</u>	 EG-Konf.
		<u>Special Test Certificate</u>
Test Certificates	Marine / Shipping	
<u>Type Test Certificates/Test Report</u>	 ABS	 LRS
	 PRS	 RINA
	 RMRS	
Marine / Shipping	other	Railway
 DNV-GL	<u>Confirmation</u>	<u>Vibration and Shock</u>
Further information		

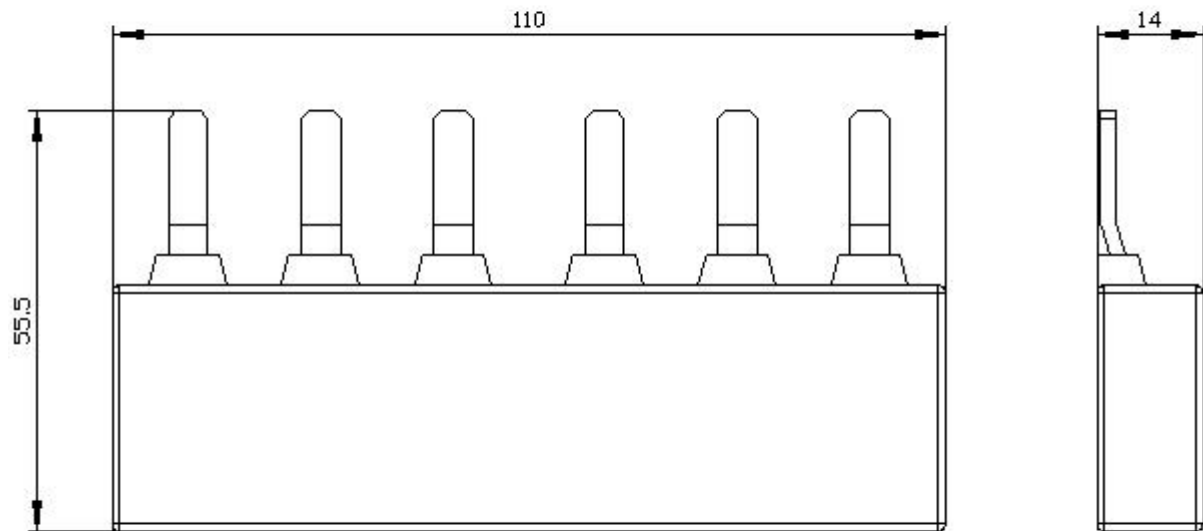

last modified:

12/15/2020 