SIEMENS

Data sheet 3RV2901-1D

Auxiliary switch transverse 1 CO, screw terminal for circuit breaker 3RV2



General technical data		
product brand name		SIRIUS
product designation		auxiliary switch, transverse on the front
design of the product		transverse auxiliary switches
size of the circuit-breaker		S00, S0, S2, S3
ambient temperature		
 during storage 	°C	-50 + 80
 during operation 	°C	-20 +60
Auxiliary circuit		
number of NC contacts for auxiliary contacts instantaneous contact		0
number of NO contacts for auxiliary contacts instantaneous contact		0
number of CO contacts of auxiliary contacts instantaneous contact		1
operational current		
 of auxiliary contacts 		
— at AC-12		
— at 24 V	Α	10
— at 230 V	Α	10
— at 400 V	Α	10
— at 690 V	Α	10
— maximum	Α	10
— at AC-15		
— at 24 V	Α	4
— at 230 V	Α	3
— at 400 V	Α	1.5
— at DC-13		
— at 24 V	Α	1
— at 110 V	Α	0.22
— at 220 V	Α	0.1
— at 250 V	Α	0.1
at AC-15 at 690 V rated value	Α	0.5
Installation/ mounting/ dimensions		
fastening method		plug-in fixing
width	mm	45
height	mm	12
depth	mm	17

Connections/ Terminals		
type of electrical connection for auxiliary and control circuit	screw-type terminals	
type of connectable conductor cross-sections		
 for auxiliary contacts 		
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
finely stranded		
 — with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
 at AWG cables for auxiliary contacts 	2x (20 14)	
Certificates/ approvals		
certificate of suitability	CE / UL / CSA / CCC	
General Product Approval		Declaration of Conformity







<u>KC</u>



Miscellaneous

Declaration	of
Conformity	

Test Certificates

Shipping Approval



Special Test Certific-ate Type Test Certific-ates/Test Report







Shipping Approval



Railway









Confirmation


Confirmation

Vibration and Shock

Further information

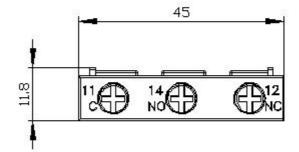

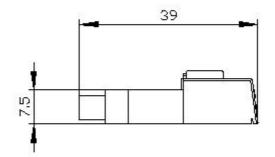

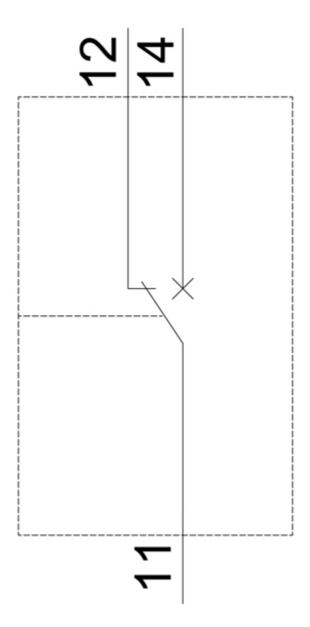

last modified: 12/18/2020 🖸