SIEMENS

Data sheet

3SU1000-1BD20-0AA0





Mushroom pushbutton, 22 mm, round, plastic, red, 40 mm, momentary contact type

product brand name	SIRIUS ACT		
product designation	Mushroom pushbuttons		
design of the product	Actuating/signaling element		
product type designation	3SU1		
product line	Plastic, black, 22 mm		
Enclosure			
number of command points	1		
Actuator			
principle of operation of the actuating element	momentary contact type		
product extension optional light source	No		
color of the actuating element	red		
material of the actuating element	plastic		
shape of the actuating element	round		
outer diameter of the actuating element	40 mm		
number of switching positions	2		
Front ring			
product component front ring	Yes		
design of the front ring	Standard		
material of the front ring	plastic		
color of the front ring	black		
General technical data	_		
product function			
 EMERGENCY OFF function 	No		
 EMERGENCY STOP function 	No		
protection class IP	IP66, IP67, IP69(IP69K)		
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13		
shock resistance			
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms		
 for railway applications acc. to DIN EN 61373 	Category 1, Class B		
vibration resistance			
• acc. to IEC 60068-2-6	10 500 Hz: 5g		
 for railway applications acc. to DIN EN 61373 	Category 1, Class B		
operating frequency maximum	3 600 1/h		
mechanical service life (operating cycles) typical	10 000 000		
reference code acc. to IEC 81346-2	S		
Substance Prohibitance (Date)	01.10.2014 00:00:00		

ambient temperatu	re					
during operation		-2	-25 +70 °C			
during storage		-4	-40 +80 °C			
environmental category during operation acc. to IEC 60721		to IEC 3N	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95 %)			
Installation/ mountin	g/ dimensions					
height			40 mm			
width			40 mm			
shape of the installation opening			und			
mounting diameter			22.3 mm			
positive tolerance of installation diameter		0.4	0.4 mm			
mounting height		27	27.5 mm			
installation width		40	40 mm			
installation depth			24.4 mm			
Certificates/ approva	ls					
General Product Approval			Declaration of Cor	nformity	Test Certificates	
(SP)	UL u	EHC		CE EG-Konf.		
Test Certificates	Marine / Shipping					
	ABS	Lloyds Register us	PRS	RINA	RMRS	
other						
other						

Further information



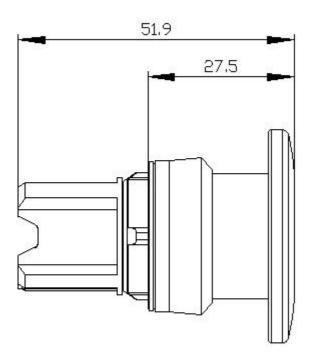

last modified:

12/21/2020 🖸