## **SIEMENS**

## **Data sheet**

## 3SU1001-0AA20-0AA0



Illuminated pushbutton, 22 mm, round, plastic, red, pushbutton, flat, latching, Push-to-release mechanism

product brand name	SIRIUS ACT
product designation	Illuminated pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Plastic, black, 22 mm
Enclosure	
number of command points	1
Actuator	
design of the actuating element	Flat button
principle of operation of the actuating element	latching
product extension optional	
• light source	Yes
contact module	Yes
color of the actuating element	red
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.5 mm
type of unlocking device	push-to-unlatch mechanism
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	plastic
color of the front ring	black
General technical data	
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms
for railway applications acc. to DIN EN 61373	Category 1, Class B
vibration resistance	
• acc. to IEC 60068-2-6	10 500 Hz: 5g
for railway applications acc. to DIN EN 61373	Category 1, Class B
operating frequency maximum	1 800 1/h
mechanical service life (operating cycles) typical	500 000
reference code acc. to IEC 81346-2	S
Substance Prohibitance (Date)	01.10.2014 00:00:00
Ambient conditions	

Web: https://www.bolenscontrol.com/ - Phone: (800) 658-5241 - Email: sales@bolenscontrol.com

ambient temperature -25 ... +70 °C • during operation • during storage -40 ... +80 °C environmental category during operation acc. to IEC 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95 %) 60721 Installation/ mounting/ dimensions height 29.5 mm width 29.5 mm shape of the installation opening round mounting diameter 22.3 mm positive tolerance of installation diameter 0.4 mm mounting height 11 mm installation width 29.5 mm installation depth 24.3 mm Certificates/ approvals

Certificates/ approvais

General Product Approval Declaration of Conformity Test Certificates









**Test Certificates** 

Marine / Shipping













other

Further information



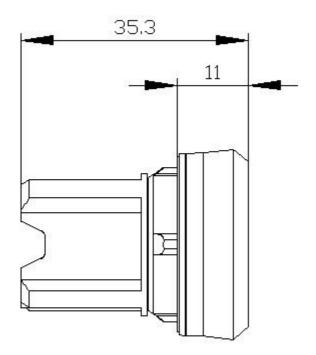

last modified: 12/21/2020 🖸