## SIEMENS

## Data sheet

## 3SU1060-0JB40-0AA0





Pushbutton, 30 mm, round, metal, matte, green, front ring for flush installation, momentary contact type

product brand name	SIRIUS ACT
product designation	Pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Metal, matt, flat, 30 mm
Enclosure	
number of command points	1
Actuator	
design of the actuating element	Flat button
principle of operation of the actuating element	momentary contact type
product extension optional	
light source	No
contact module	Yes
color of the actuating element	green
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	38 mm
Front ring	
product component front ring	Yes
design of the front ring	Flat
material of the front ring	Metal, matt
color of the front ring	sand gray
General technical data	
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• acc. to IEC 60068-2-27	Sinusoidal half-wave 50g / 11 ms
<ul> <li>for railway applications acc. to DIN EN 61373</li> </ul>	Category 1, Class B
vibration resistance	
• acc. to IEC 60068-2-6	10 500 Hz: 5g
<ul> <li>for railway applications acc. to DIN EN 61373</li> </ul>	Category 1, Class B
operating frequency maximum	3 600 1/h
mechanical service life (switching cycles) typical	10 000 000
reference code acc. to IEC 81346-2	S
Substance Prohibitance (Date)	01.10.2014 00:00:00
Substance Prohibitance (Date) Ambient conditions	01.10.2014 00:00:00

during operation		-2	-25 +70 °C			
during storage		-4	-40 +80 °C			
environmental category during operation acc. to IEC 60721		to IEC 3N	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95 %)			
nstallation/ mounting	g/ dimensions					
height		38	38 mm			
width		38	38 mm			
shape of the installation opening		ro	Ind			
mounting diameter		30	.5 mm			
positive tolerance of installation diameter		0.9	5 mm			
mounting height		4.2	2 mm			
installation width			mm			
installation depth		31	.1 mm			
ertificates/ approva	ls					
General Product A	oproval		Declaration of Cor	nformity	Test Certificates	
QP.	( <sup>ų</sup> L)	FHI	CE			
		EHL	CE EG-Konf.			
Test Certificates	UL Marine / Shipping	EHL	CE EG-Konf.			
Test Certificates	Marine / Shipping	EHC Lloyd's Register	EG-Konf.	RINA	RMRS	
Test Certificates	Marine / Shipping	EHC Lloyds Register Lits	EG-Konf.	RINA	RMRS	
	Marine / Shipping	EHL Lloyd's Register Lits	EG-Konf.	RINA	<b>EMRS</b>	

Further information



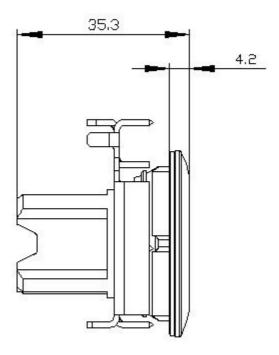

last modified:

12/21/2020 🖸