



Data sheet | Item number: 216-242


Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated;
electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

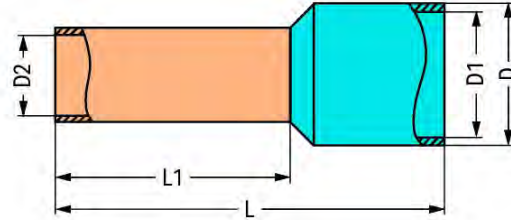

Subject to changes. Please also observe the further product documentation!

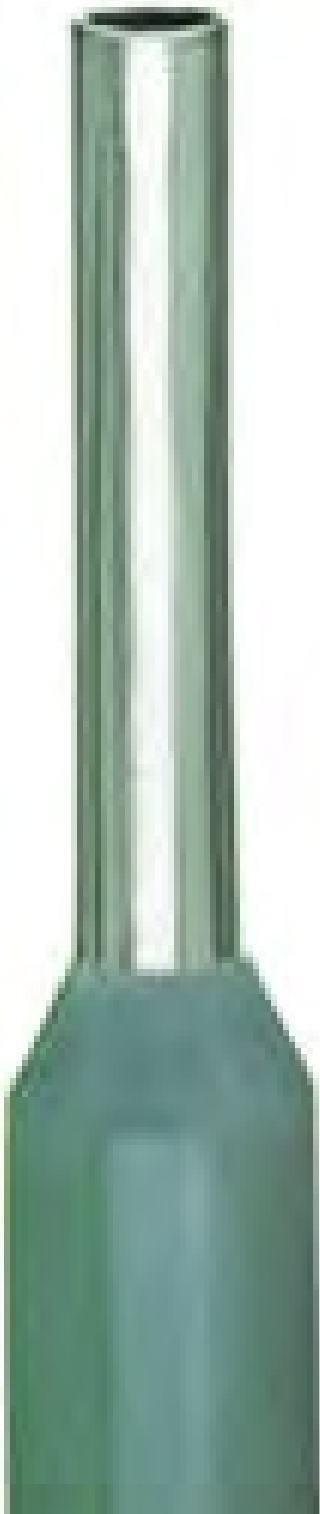

Subject to changes. Please also observe the further product documentation!

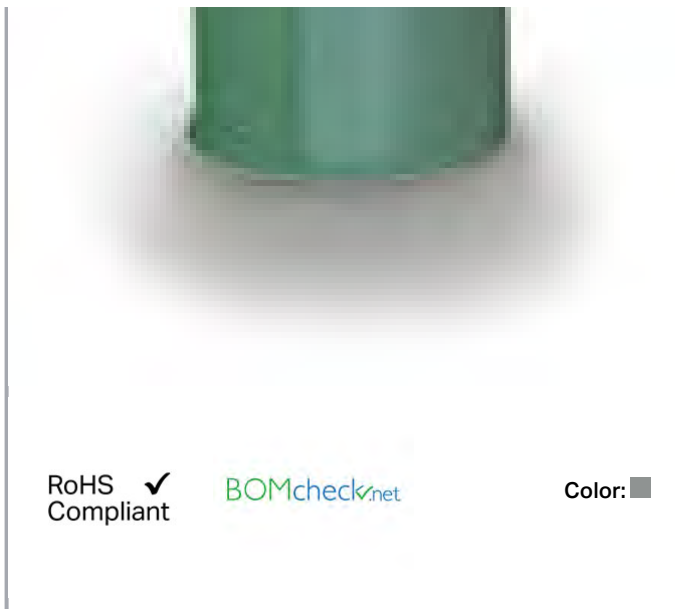

Data

Technical Data

Main product function	Ferrule
Sleeve cross-section (AWG)	18 AWG
Sleeve for	0.75 mm ²

Connection data

Strip length	12 mm / 0.47 inch
--------------	-------------------

Geometrical Data

Length	16 mm
Length	16 mm
Length 1	10 mm
Diameter	3.3 mm
Diameter	3.3 mm
Diameter 1	2.8 mm
Diameter 2	1.2 mm

Material Data

Color	gray
Fire load	0.002 MJ

Subject to changes. Please also observe the further product documentation!


Weight	0.1 g
--------	-------

Commercial data

Product Group	2 (Terminal Block Accessories)
Packaging type	BOX
Country of origin	DE
GTIN	4044918016322
Customs tariff number	85369010000

Counterpart

Installation Notes

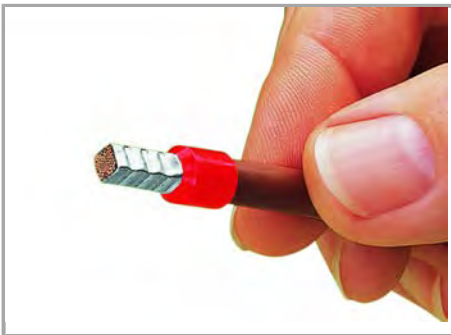

A perfect gas-tight crimp – both electrically and mechanically reliable

Subject to changes. Please also observe the further product documentation!