





RoHS Compliant

BOMcheck.net

Color:

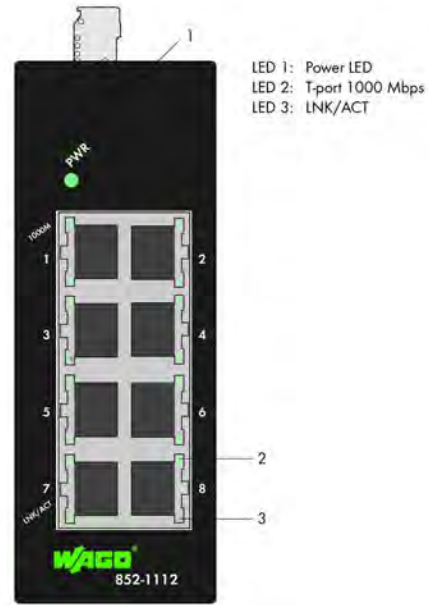

Subject to changes. Please also observe the further product documentation!

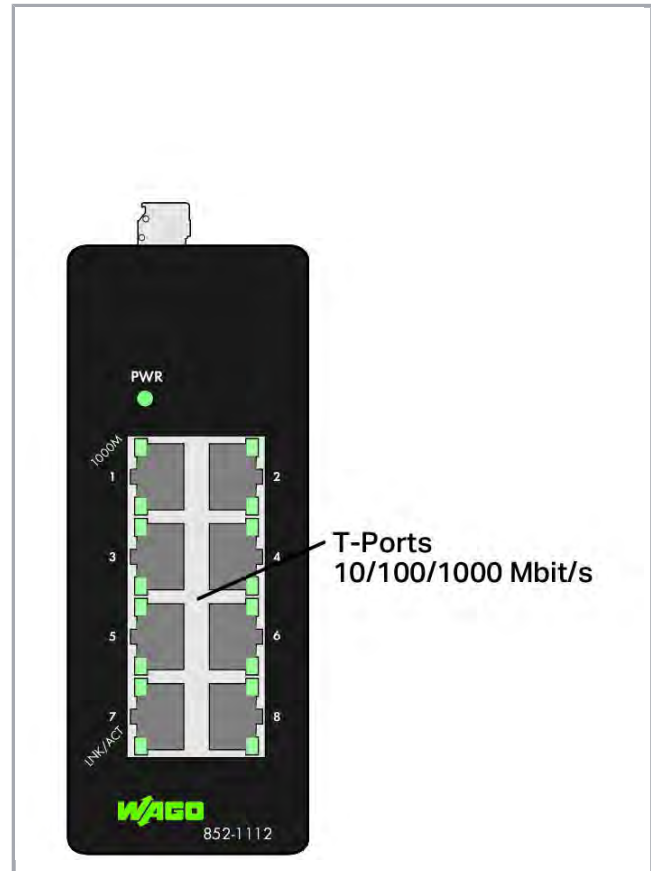

Item description

The 852-1112 Industrial ECO Switch is an 8-port 1000Base-T ETHERNET switch supporting autonegotiation and Auto-MDI-/MDI-X detection for each port.

Using the switch's eight ports, several segments can be created to reduce the network load, while providing a dedicated bandwidth to each user node. The 852-1112 is a cost-effect solution to keep up with the constant demands of IP-based, industrial communication needs.

The switch is easy to configure and install and is best suited for small to medium-sized networks.

Features:

Subject to changes. Please also observe the further product documentation!



- 8 ETHERNET ports, 10/100/1000 Mbps autonegotiation
- Front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X functions
- Full/half-duplex transfer modes for each port
- Store-and-forward switching method
- Integrated address look-up table, supports up to 8000 absolute MAC addresses
- Overvoltage protection
IEEE 802.3x flow control in full-duplex mode
- Prioritization of Profinet Ethernet data packets (EtherType=0x8892) per IEEE802.1p
- DIN-35 rail mounting

Data

Technical Data

Switching mode	Store-and-forward; non-blocking
Number of 1000Base-T ports	8
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Prioritization
MAC table (size)	8000 addresses
Jumbo frame size	9000. Byte
Supply voltage	DC 9 ... 57 V
Power consumption (max.)	6 W
Baud rate	Copper cable: 10/1000 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length
Topology	Star
Indicators	Device: LED (PWR) green: Power supply; per port: LED (1000) green: Status 1000 Mbps, 1000 Mbps ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-432/001-000; included female connector (MCS Connectors): 2231-102/026-000

Geometrical Data

Width	46 mm / 1.811 inch
-------	--------------------

Subject to changes. Please also observe the further product documentation!

Height from upper-edge of DIN-rail	99,6 mm / 3.921 inch
Depth	116 mm / 4.567 inch

Mechanical data

Weight	487 g
Color	black
Housing material	Sheet steel
Conformity marking	CE

Environmental Requirements

Surrounding air temperature (operation)	0 ... 60 °C
Surrounding air temperature (storage)	-40 ... 80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4

Commercial data

Packaging type	BOX
Country of origin	TW
GTIN	4055143500180
Customs tariff number	85176200000

Counterpart

Compatible products

wiring and connectors



Item no.: 750-976
PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly



Item no.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22

Subject to changes. Please also observe the further product documentation!



Item no.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



Item no.: 750-977/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22



Item no.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



Item no.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



Item no.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



Item no.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



Item no.: 750-978/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief



Item no.: 750-978/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief



Item no.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



Item no.: 750-979/000-011
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



Item no.: 750-979/000-012
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



Item no.: 750-979/000-013
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief



Item no.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief

Subject to changes. Please also observe the further product documentation!



Item no.: 750-979/000-022

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief

transfer module



Item no.: 289-195

Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

power supply



Item no.: 787-1102

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 1.3 A output current; DC OK signal



Item no.: 787-1112

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 2.5 A output current; DC OK signal



Item no.: 787-1122

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 4 A output current; DC OK signal



Item no.: 787-1226

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 6 A output current



Item no.: 787-1702

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 1.25 A output current



Item no.: 787-1712

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 2.5 A output current



Item no.: 787-1722

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current

Downloads

Documentation

Manual

8-Port 1000BASE-T Industrial ECO Switch

V 1.2.0

Dec 17, 2019

Additional Information

Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

System Description

Industrial Switches – General Product Information

Subject to changes. Please also observe the further product documentation!



CAD/CAE-Data

CAD data

2D/3D Models 852-1112

Installation Notes

Subject to changes. Please also observe the further product documentation!