
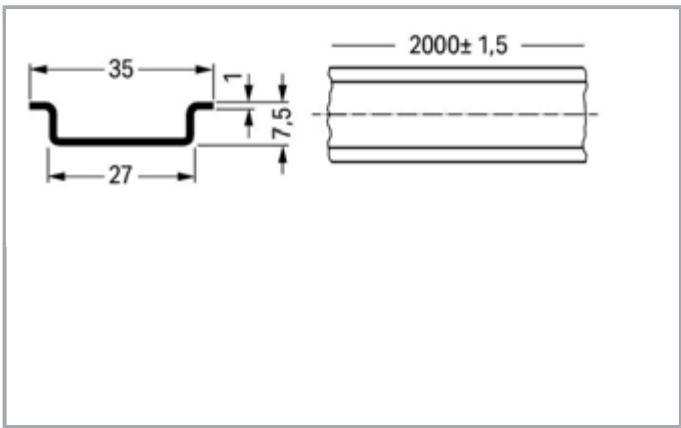


Data sheet | Item number: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

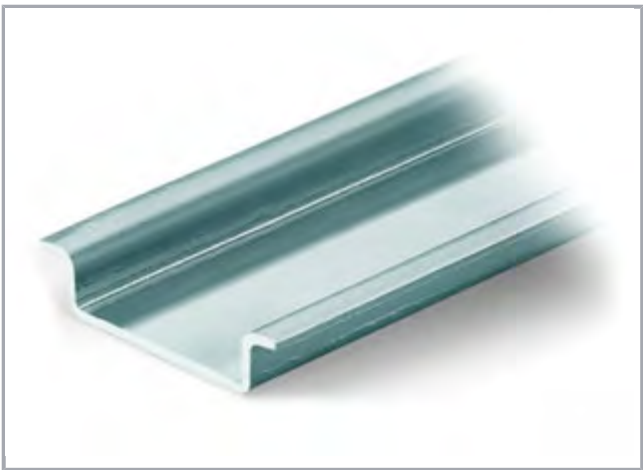

Data
Technical Data

Main product function	Mounting Accessories
-----------------------	----------------------

Geometrical Data

Width	2000 mm / 78.74 inch
-------	----------------------

Subject to changes. Please also observe the further product documentation!

Height	7.5 mm / 0.295 inch
Depth	35 mm / 1.378 inch

Material Data

Weight	690 g
--------	-------

Commercial data

Product Group	2 (Terminal Block Accessories)
Packaging type	BOX
Country of origin	IT
GTIN	4017332272308
Customs tariff number	72169180000

Compatible products

assembling



Item no.: 209-137
Mounting adapter; can be used as end plate; 6.5 mm wide; gray



Item no.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item no.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item no.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

General accessories



Item no.: 209-109
Edge guards; for DIN 35 rail (7.5 mm high); gray

Marking accessories



Item no.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white



Item no.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm; white

Subject to changes. Please also observe the further product documentation!



Downloads

CAD/CAE-Data

CAD data

2D/3D Models 210-113

CAE data

WSCAD Universe 210-113

ZUKEN Portal 210-113

Installation Notes

DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0
Current applies to rails of 1 m/3'3" length			

When using standard carrier rails as ground conductor busbars, please refer to the maximum current capacities listed above.

Steel carrier rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).

Subject to changes. Please also observe the further product documentation!
